


Catalogo



Productos de diagnóstico



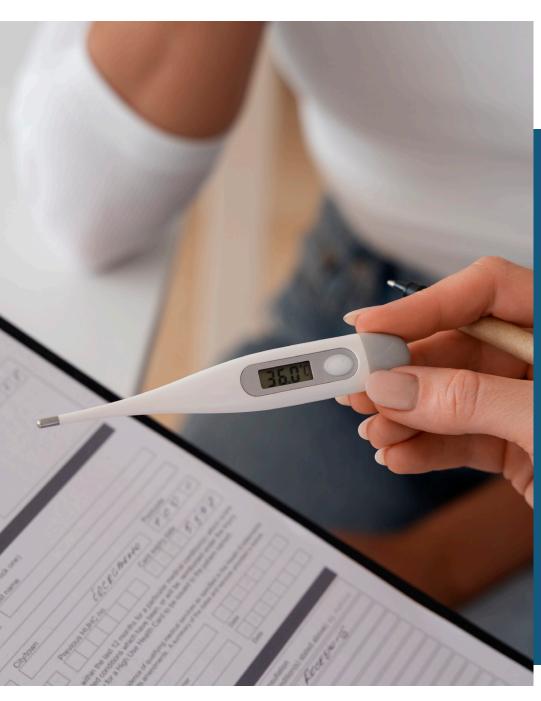





Aneroid Sphygmomanometer

300mmHg Gauge Cotton or Nylon cuff With or without D-ring is available Artery label Vinyl or Nylon zippered carrying case

GT001-101

Aneroid Sphygmomanometer



GT001-110

Aneroid Sphygmomanometer With Separate Single Head Stethoscope



GT001-111

Aneroid Sphygmomanometer with Attached Single Head Stethoscope



Palm Type Aneroid Sphygmomanometer Plastic Shell 65mm Diameter dial



Palm Type Aneroid Sphygmomanometer Metal Shell 65mm Diameter dial






GT001-122

Palm Type Aneroid Sphygmomanometer Metal Shell 50mm Diameter dial



GT001-123

Palm Type Aneroid Sphygmomanometer Metal Shell 65mm Diameter dial



Palm Type Aneroid Sphygmomanometer Metal Shell 50mm Diameter dial



GT001-125

Palm Type Aneroid Sphygmomanometer Plastic Shell 65mm Diameter dial





GT001-126

Palm Type Aneroid Sphygmomanometer Plastic Shell 55mm Diameter dial





GT001-130

Arm Type Aneroid Sphygmomanometer

GT001-140

White plastic cover Type Aneroid Sphygmomanometer



GT001-150

Desk Type Aneroid Sphygmomanometer



GT001-160

Wall Type Aneroid Sphygmomanometer

GT001-127

Five Size Blood Pressure Kit

1PC Palm Type Aneroid Sphygmomanometer Gauge 5Pcs Sizes Cuff with latex baladder & quick release

luer adapter:

 1PC Infant Cuff:
 28cm x8cm

 1PC Child Cuff:
 34.5cm x11cm

 1PC Adult Cuff:
 50.8cm x14cm

 1PC Large Cuff:
 63cm x17.5cm

 1PC Thigh Cuff:
 72cm x21cm

1Pc Penlight

1PC Dual head Stethoscope 1Pc Neurological Hammer 1Pc Nylon Carrying Case

Form of packing:

10pcs/carton Size of packing:

Export carton:600x420x300mm





GT001-170 Floor Type Aneroid Sphygmomanometer

Form of packing:

One machine fill in a white box, and every one boxes in one export carton.

Size of packing:

White box:495x460x170mm Export carton:500x470x185mm

Mercury Sphygmomanometer

300mmHg scale glass tubes
Metal case
Cotton or nylon cuff,
With or without D-ring is available
Artery label
Latex bladder with double tubes





GT001-200

Professional Mercury Sphygmomanometer Desk type



GT001-201 LCD Display



GT001-202 Light Display



GT001-210 Mercury Sphygmomanometer Wall Type



GT001-220 Mercury Sphygmomanometer Floor Type



Fully automatic electronic blood pressure monitor

Display system: Digital display system/LCD

Measuring range: 2.7kpa-40kpa(20mmHg-300mmHg)

Accuracy: 0.5kPa(4mmHg)

Power source: Type AA batteries*4 for arm type

Type AA batteries*2 for wrist type

Operating environment: -5'C less than 95RH
Automatic power off: To be automatically cut off
after few minutes of non use to save energy







GT001-301 Arm type GT001-302 Arm type GT001-303 Arm type



GT001-311 Wrist type



GT001-312 Wrist type



GT001-313 Wrist type



PRODUCTOS DE DIAGNÓSTICO STETHOSCOPE

Single head stethoscope

Oxided or Anodized Aluminum chest piece
Brass Chrome Plated Binaural
Plastic eartips
All kinds of color avaiblable for the tube such as: Black, Red, Green, Yellow, Blue, Purple, Pink, Grey, White, etc.




GT002-100 Single head stethoscope Silver chest piece

GT002-110 Single Head Stethoscope Colored chest piece & Binaural



GT002-130 Single head stethoscope with plastic ring

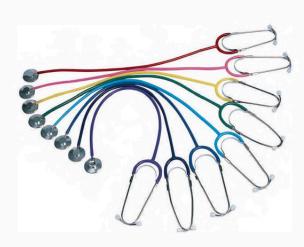



GT002-120 Pediatric Single head Stethoscope

Deluxe Special Single head Stethoscope Zinc alloy chest piece with chrome plated silver finish



GT002-150
Bowles stethoscope
Chromeplated chest piece

GT002-160
Disposable Single Head Stethoscope
Plastic

Dual head stethoscope

Oxided or Anodized Aluminum chest piece
Brass Chrome Plated Binaural
Plastic or soft eartips
All kinds of color avaiblable for the tube such as: Black, Red, Green, Yellow, Blue, Purple,
Pink, Grey, White, etc.




GT002-200 Dual head stethoscope Silver chest piece

GT002-210
Dual head stethoscope
Colored chest piece & Binaural



GT002-220 Pediatric Dual Head Stethoscope

GT002–261Teaching use dual head stethoscope

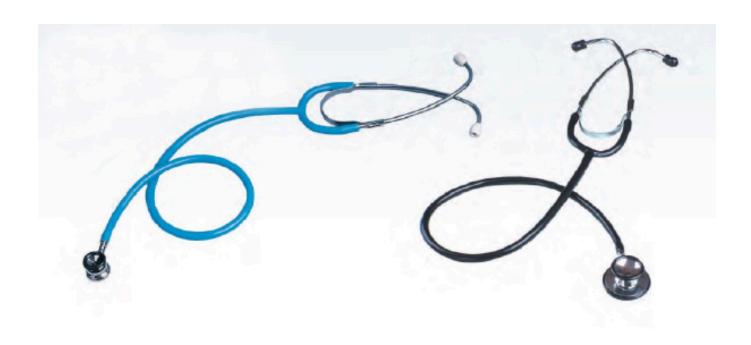

GT002-230 Neonatal Dual Head Stethoscope

GT002-240
Dual head stethoscope
with non-chill ring
with soft eartips



GT002-250
Dual head stethoscope with non-chill ring with soft eartips



GT002-260 Teaching Use Dual head stethoscope

Stainless Steel Stethoscope

Stainless Steel chest piece Stainless Steel Binaural Plastic & soft eartips With non-chill rims Spare diaphragm included

All kinds of color avaiblable for the tube such as: Black, Red, Green, Blue, Pink, Grey, etc.



GT002-280 Stainless Steel Stethoscope Child type



GT002-290 Stainless Steel Stethoscope Cardiology type GT002-291 Stainless Steel Stethoscope Cardiology type

Sprague Rappaport Stethoscope

Sprague Rappaport type chest piece
Brass Chrome Plated Binaural
Plastic or soft eartips
All kinds of color avaiblable for the tube such
as: Black, Red, Green, Yellow, Blue, Purple, Pink, Grey, etc.
2sets of earplug, 1set of mebrane,
1pc of Large chest piece,
1pc of Middle chest piece,
1pc of Small chest piece



GT002–300Sprague Rappaport Stethoscope
Silver color chest piece



GT002–310Sprague Rappaport Stethoscope
Colored chest piece



GT002–320Sprague Rappaport Stethoscope
Transparent tube



Fetal Stethoscope
GT002-400 Metal type
GT002-410 Pinard plastic type in white







GT003-100 Buck Neurological Hammer

hammerhead: zinc alloy with rubber plug handle: nylon with needle: zinc alloy, with brush

with needle: zinc alloy, with brus length of hammer: 22.5cm height of hammer head: 8.5cm



GT003-GF05B Colorflex reflex hammer

hammerhead: rubber with copper ring

handle: nylon

length of hammer: 22.5cm height of hammerhead: 7.5cm



GT003-200 Gear Wheel Hammer

hammerhead:zinc alloy handle: zinc alloy



GT003-300 Taylor Hammer

Length of handle: 18cm Size of rubber plug: 5 X 4.3 X 1cm thickness of rubber plug: 1.5cm



GT003-400

Babinski (Adult) with Telescoping Handle

hammerhead: zinc alloy with rubber plug handle: zinc alloy length of handle: 21cm diameter of hammerhead: 4.5cm thickness: 1cm



GT003-500

Gristletly Hammer Rubber plug

hammerhead: copper handle: steel length of hammer: 24cm

diameter of hammerhead: 4.5cm



GT006-100

GT006-200



GT054-200

Tourniquet

GT054-200-D GF03 GT054-200-C GF03 GT054-200-F GF03 GT054-200-KA GF03 GT054-200-H GF03

GF03D, 45x2.5cm GF03C, Kids,38.5x2.5cm GF03F,45x2.5cm GF03KA,45x2.5cm GF03H,45x2.5cm



GT143-100 Sound gear Material:steel



GT143-102 Resonance tuning fork





GT143-101 F256 tuning fork Material: steel



GT143-103 F512 tuning fork Material: steel



GT003-100 Buck Neurological Hammer

hammerhead: zinc alloy with rubber plug handle: nylon with needle: zinc alloy, with brush

with needle: zinc alloy, with brus length of hammer: 22.5cm height of hammer head: 8.5cm



GT003-GF05B Colorflex reflex hammer

hammerhead: rubber with copper ring

handle: nylon

length of hammer: 22.5cm height of hammerhead: 7.5cm



GT003-200 Gear Wheel Hammer

hammerhead:zinc alloy handle: zinc alloy



GT003-300 Taylor Hammer

Length of handle: 18cm Size of rubber plug: 5 X 4.3 X 1cm thickness of rubber plug: 1.5cm



GT003-400

Babinski (Adult) with Telescoping Handle

hammerhead: zinc alloy with rubber plug handle: zinc alloy length of handle: 21cm diameter of hammerhead: 4.5cm thickness: 1cm



GT003-500

Gristletly Hammer Rubber plug

hammerhead: copper handle: steel length of hammer: 24cm

diameter of hammerhead: 4.5cm



GT006-100

GT006-200



GT054-200

Tourniquet

GT054-200-D GF03 GT054-200-C GF03 GT054-200-F GF03 GT054-200-KA GF03 GT054-200-H GF03

GF03D, 45x2.5cm GF03C, Kids,38.5x2.5cm GF03F,45x2.5cm GF03KA,45x2.5cm GF03H,45x2.5cm



GT143-100 Sound gear Material:steel



GT143-102 Resonance tuning fork





GT143-101 F256 tuning fork Material: steel



GT143-103 F512 tuning fork Material: steel





GT005-100 ENTKit

Ophthalmoscope-1
Otoscope carrier-1
Ear specula(3,4,5,6mm diam)-4
Nasal apeculum(8mm diam)
Dilating Nasal speculum-1
Laryngeal mirror stem-1
Laryngeal Mirrors-3
Tongue depressor plastic-1
Battery handle-1
Spare Bulbs(2large,4small)-6

GT005-101

Professional otoscope

Features

Fiberoptics for cool, obstruction free light transmission Otoscope head made from polymid – an impact resistant space age thermoplastic Swivelling viewing window with 2.5x magnification "AA" polycarbonate battery handle interchanges pocket clip with intergral on/off slide switch for

ambidextrous use Technical data

magnification: 2.5x distal dia: 2.5mm, 4mm Bulb: 2.5V 1.6W halogen lamp

Batteries: two "AA" batteries or two "AA" NiMH

Rechargeable Battery



GT005-102

Otoscope deluxe packing: penlight, part of otoscope, batteries



GT005-200

Reflex hammer gifts set buck neurological hammer babinski with telescoping handle taylor hammer



GT005-103

Otoscope deluxe packing: penlight, part of otoscope, batteries



GT005-201

Buck neurological hammer gear wheel hammer taylor hammer gristletty hammer



GT005-202

Buck neurological hammer gear wheel hammer taylor hammer gristletly hammer babinski telescoping handle

GT005-204

Fiber laryngeal mitrror Power suply: 1.5V x 2 "C" type Bulb: 2.5V / 0.35A Blades: 92, 114, 134mm



GT005-302 **BO** monitor Gift Set

1pc thermometer

the gift set including the following products: 1set BP monitor 1pc reflex hammer 1pc penlight 1pc dual head stethoscope

GT040-500

Disposable electrosurgical pencil

- 1.170mm-ABS pencil appearance
- 2.7cm Stainless Steel tip
- 3.2.36mm-diameter of the tip
- 4.3m-PVC medical cable
- 5.Maximal output current: 1A 6.Frequency confine:0-1.0MHZ
- 7. Ways of aseptic technique: Sterile EO
- 8.Current resistance:200Ω

9.Term of sterility:3 years 10.Package: 100PCS/Carton



Clinical Thermometer

Glass

Scale: °Cor, °C &°F

Accuracy: ± 0.1 °C (±0.2°F) White back, Yellow back or Blue back

Throathand Thories to be a key of a see

GT004-130 Oral Use



GT004-140 Rectal Use

Digital Thermometer

Pen type,3-Digital Scale:°C or°F

Accuracy: ±0.1°C(±0.2°F)

Min Scale: 0.1°C

Memory function: last temperature

Measuring times: 2 minutes

Beeper function Auto shut-off



GT004-201

Display range: 32.0℃~42.0℃,

89.6°F~107.6°F

Accuracy: ±0.1°C, ±0.2°F Min Scale: 0.1°C / 0.1°F Response: 60 seconds

size: 127 x 18 x 10 mm LCD: 15.5 x 6.5 mm

N.W.: 10.5g



GT004-142

digital thermometer

Cover for

GT004-203

GT004-141

mercury thermometer

Cover for

Digital thermometer Without waterproof function hard tip

Temperature range: 32.0℃~49.0℃,

Accuracy: ±0.1℃

Display mode: LCD (three and a half)

Power: 0.15mW(working)

Battery: AG31.5V ordinary button battery

Sound Tip: beep after measurement

Raw material: ABS plastic



GT004-202

Large LCD display

Display range: 32.0℃~42.0℃,

89.6°F~107.6°F

Accuracy: $\pm 0.1^{\circ}\text{C}$, $\pm 0.2^{\circ}\text{F}$ Min Scale: $0.1^{\circ}\text{C} / 0.1^{\circ}\text{F}$ Response: 60 seconds size: $122 \times 17 \times 10 \text{ mm}$ LCD: $20 \times 7.5 \text{ mm}$

N.W.: 9.5g



GT004-204

Digital thermometer Soft tip waterproof

Temperature range: 32.0℃~42.9℃,

Accuracy: ±0.1℃

Display mode: LCD (three and a half)

Power: 0.15mW(working)

Battery: AG31.5V ordinary button battery

Sound Tip: beep after measurement

Raw material: ABS plastic



GT004-205

Transparent

Display range: 32.0℃~42.0℃,

89.6°F~107.6°F

Accuracy: ± 0.1 °C, ± 0.2 °F Min Scale: 0.1°C / 0.1°F Response: 60 seconds size: $127 \times 18 \times 10$ mm LCD: 17.5×7.5 mm

N.W.: 10.5g



GT004-206

Display range: 32.0℃~42.0℃,

89.6°F~107.6°F

Accuracy: $\pm 0.1^{\circ}\text{C}$, $\pm 0.2^{\circ}\text{F}$ Min Scale: $0.1^{\circ}\text{C} / 0.1^{\circ}\text{F}$ Response: 60 seconds size: $127 \times 18 \times 10 \text{ mm}$ LCD: $16.5 \times 7 \text{ mm}$

N.W.: 10.5g

GT004-207

60" temperature taking lead time.
9 minutes Auto Off
Fever alarm
Memory of last reading
0.1 resolution
Bi-Bi signal after measurement finished
LCD size at 18 x 9.4 mm
Waterproof available at additional cost



Digital Thermometer

Pen type, 4-Digital

Scale: °C

Accuracy: ±0.05°C Min Scale: 0.01°C

Memory function: last temperature Measuring times: 2 minutes

Beeper function Auto shut-off



GT004-220 GT004-221

Water Resistance Digital Thermometer

Pen type,3-Digital Scale: °C or °F

Accuracy: ±0.1°C(±0.2°F)

Min Scale: 0.1°C

Memory function: last temperature

Measuring times: 2 minutes

Beeper function Auto shut-off





GT004-222

Water-proof

Display range: 32.0℃~42.0℃, 89.6°F~107.6°F

Accuracy: $\pm 0.1^{\circ}\text{C}$, $\pm 0.2^{\circ}\text{F}$ Min Scale: $0.1^{\circ}\text{C} / 0.1^{\circ}\text{F}$ Response: 60 seconds size: $127 \times 18 \times 10 \text{ mm}$ LCD: $17.5 \times 7.5 \text{ mm}$

N.W.: 10.5g



GT004-223

High accuracy Large LCD display Water-proof

Display range: 32.0℃~43.0℃,

89.6°F~109.4°F

Accuracy: ±0.1°C, ±0.2°F Min Scale: 0.01°C / 0.01°F Response: 60 seconds size: 133 x 18 x 13 mm

LCD: 20 x 7 mm N.W.: 9g



GT004-230

Flexible Tip Digital Thermometer

Pen type,3-Digital Scale:°C or°F

Accuracy: ±0.1°C (±0.2°F)

Min Scale: 0.1°C

Memory function: last temperature

Measuring times: 2 minutes

Beeper function Auto shut-off

GT004-231

Flexible probe Water-proof Large LCD display

Display range: 32.0℃~42.0℃,

89.6°F~107.6°F

Accuracy: ±0.1°C, ±0.2°F Min Scale: 0.1°C / 0.1°F Response: 60 seconds size: 126 x 18 x 10 mm

LCD: 20 x 7 mm N.W.: 11.5g



Flexible probe Water-proof Large LCD display

Display range: 32.0℃~42.0℃,

89.6°F~107.6°F

Accuracy: ±0.1°C, ±0.2°F Min Scale: 0.1°C / 0.1°F Response: 60 seconds size: 125 x 20 x 11 mm

LCD: 20 x 7 mm N.W.: 11.5g

GT004-233

Flexible probe Water-proof Large LCD display

Flexible tip more safe suit for baby;
60" temperature taking lead time.
9 minutes Auto Off
Fever alarm
Memory of last reading
0.1 resolution
Bi-Bi signal after measurement finished
LCD size at 18 x 9.4 mm
Water-resistant available at additional cost









GT004-260

Fast reading Large LCD display

Display range: 32.0℃~42.0℃, 89.6°F~107.6°F

Accuracy: ±0.1°C, ±0.2°F Min Scale: 0.1°C / 0.1°F Response: 10 seconds

size: 134 x 22 x 14 mm LCD: 20.7 x 7 mm N.W.: 12.5g



GT004-261

Fast reading / Water-proof Large LCD display

Display range: 32.0℃~42.0℃, 89.6°F~107.6°F

Accuracy: ±0.1°C, ±0.2°F Min Scale: 0.1°C / 0.1°F Response: 10 seconds

size: 134 x 22 x 14 mm LCD: 20.7 x 7 mm N.W.: 12.5g



GT004-262

Fast reading / Water-proof Large LCD display

Display range: 32.0℃~42.0℃,

89.6°F~107.6°F

Accuracy: ±0.1°C, ±0.2°F Min Scale: 0.1°C / 0.1°F Response: 10 seconds

size: 134 x 22 x 14 mm LCD: 20 x 7.5 mm N.W.: 13.5g

GT004-263

Fast reading Flexible probe Large LCD display

Display range: 32.0℃~42.0℃,

89.6°F~107.6°F

Accuracy: ±0.1℃, ±0.2°F Min Scale: 0.1°C / 0.1°F Response: 10 seconds size: 134 x 22 x 14 mm

LCD: 20.7 x 7 mm N.W.: 12.5g



Fast reading Flexible probe Water-proof Large LCD display

Display range: 32.0℃~42.0℃,

89.6°F~107.6°F

Accuracy: ±0.1℃, ±0.2°F Min Scale: 0.1°C / 0.1°F Response: 10 seconds size: 134 x 22 x 14 mm

LCD: 20.7 x 7 mm N.W.: 12.5g

GT004-265

Fast reading Flexible probe Water-proof Large LCD display

Display range: 32.0℃~42.0℃,

89.6°F~107.6°F

Accuracy: ±0.1℃, ±0.2°F Min Scale: 0.1°C / 0.1°F Response: 10 seconds

size: 132 x 22 x 14 mm LCD: 20 x 7.5 mm

N.W.: 13.6g



GT-004-266

Cartoon Digital Thermometer

Cartoon design and flexible tip
Measuring rang from 32°C to 42°C (89.6°F to 111.2°F)
0.1°C accuracy and fast response
Beep alarm when peak temperature is reached
Memory for last measurement
Automatic power off
Weight: 9.7g (including battery)
waterproof



GT-004-267

Digital Thermometer (waterproof)

Measuring rang from 32°C to 42°C (89.6°F to 111.2°F) LCD manifestation easy to read 0.1°C accuracy and fast response Beep alarm when peak temperature is reached Memory for last measurement Automatic power off Weight: 9.6g (including battery) waterproof



GT-004-268

Digital Thermometer (waterproof)

Measurement time: 10 seconds

Convenient flexible tip (soft head)
10 seconds quick test
Big LCD display easy to read
Waterproof construction provides easy cleaning
Measuring range from 32°C to 42°C (89.6°F to 111.2°F)
0.1°C accuracy and fast response
Beep alarm when peak temperature is reached
Memory for last measurement
Automatic power off
Weight: 15g (including battery)





(Sine)





GT004-240

Baby use Digital Thermometer

3-Digital Scale: °C or °F

Accuracy: ±0.1°C(±0.2°F)

Min Scale: 0.1℃

Memory function: last temperature

Measuring times: 2 minutes

Beeper function Auto shut-off

GT004-241

Baby Pacifier

Digital Thermometer(Waterproof)

- 1) Display range: 32.0~42.0°C/90.0~107.6°F
- 2) Accuracy: ±0.1°C/±0.2°F
- 3) Min. scale: 0.1
- 4) Memory: last measurement reading
- 5) Measurement time (reference only, it differs from people to people): 2min
- 5) Beeper function
- 6) Auto shut-off
- 7) Battery: 1.5V button battery (LR/SR-41)
- 8) Size: 62 x 46 x 50mm
- 9) LCD: 15 x 6mm
- 10) N.W.: 13g
- 11) Memory: last measuring reading

GT004-250

Infrared Ear Thermometer

3-Digital

Scale: ℃ or °F

Accuracy: $\pm 0.2^{\circ}C(\pm 0.4^{\circ}F)$

Min Scale: 0.1°C

Memory function: 10 group Measuring times: 1 second

Beeper function Auto shut-off

GT004-252

Infrared Ear Thermometer

- 1) Display range: 34.0~44.0℃/93.2~111.2℃
- 2) Accuracy: ±0.2°C/±0.4°F
- 3) Min. scale: 0.1
- 4) Memory: 10 memories
- 5) Measurement time (reference only): 1 second
- 6) Beeper function
- 7) Auto shut-off (1min after idle)
- 8) Battery: 3V, Button battery(LR/CR 2032)
- 9) Battery life: approx. 4,000 takes
- 10) Dimensions: 110 x 35 x 35mm
- 11) N.W.: 36g (including batteries)
- 12) Safe and hygienic
- 13) Easy-clean and cover free design

GT004-253

Infrared Ear Thermometer

- 1) Display range: 34.0~44.0°C/93.2~111.2°C
- 2) Accuracy: ±0.2°C/±0.4°F
- 3) Min. scale: 0.1
- 4) Memory: 10 memories
- 5) Measurement time (reference only): 1 second
- 6) Beeper function
- 7) Auto shut-off (1min after idle) 8) Battery: AAA x 2, alkaline batteries
- 9) Battery life: approx. 4,000 takes
- 10) Size: 146 x 32 x 37mm
- 11) N.W.:75g (including batteries)
- 12) Safe and hygienic
- 13) Requires new disposable probe cover after each use



GT004-254

Infrared Ear Thermometer

- 1) Display range: 34.0~44.0°C/93.2~111.2°C
- 2) Accuracy: ±0.2°C/±0.4°F
- 3) Min. scale: 0.1
- 4) Memory: 10 memories
- 5) Measurement time (reference only): 1 second
- 6) Beeper function
- 7) Auto shut-off (1min after idle)
- 8) Battery: 3V, Button battery(LR/CR 2032)
- 9) Battery life: approx. 4,000 takes
- 10) Dimensions: 118 x 28.5 x 21mm
- 11) N.W.: 36g (including batteries)
- 12) Safe and hygienic
- 13) Easy-clean and cover free design





GT004-255 Infrared Thermometer

Range of displayed temperature:32.0°C-42.9°C(89.6°F-109.2°F)
Ambient temperature operating range:10°C-40°C(50°F-104°F)
Storage temperature range:-25°C-55°C(-13°F-131°F)
Digital increment:0.1°C/0.1°F
Maximum permissible error:

 $\pm 0.2^{\circ}\text{C}/0.4^{\circ}\text{F} 35.5-42.0^{\circ}\text{C}(95.9^{\circ}\text{F}-107.8^{\circ}\text{F})$ $\pm 0.3^{\circ}\text{C}/0.5^{\circ}\text{F} 32.0-35.4^{\circ}\text{C}(89.6^{\circ}\text{F}-95.7^{\circ}\text{F})$ $\pm 0.3^{\circ}\text{C}/0.5^{\circ}\text{F} 42.1-42.9^{\circ}\text{C}(107.8^{\circ}\text{F}-109.8^{\circ}\text{F})$

GT-004-256

Infrared Ear Thermometer (single scale or double scale display)

Display range: 32.0~42.9°C / 89.6~109.2°F

Accuracy: ±0.2°C/±0.4°F

Min. scale: 0.1


Memory: 10 memories

Measurement time (reference only): 1 second

Beeper function

Auto shut-off (10 seconds after idle)
Battery: 3V, Button battery (CR 2032)
Battery life: approx. 5,000 takes
Dimensions: 140 x 35 x 30mm
Weight: 40g (including battery)



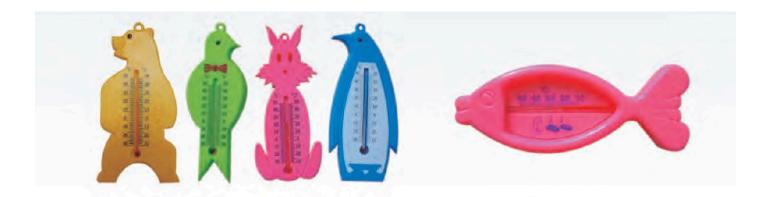

GT004-310 Air Thermometer GT004-320 Bath Thermometer



GT007-200

Advanced NM Hot-wire alcohol sensor
Quick response
SMD assembling, stable performance
Smart MCU control
Direct Testing process LCD indication
Portable design
No Touch Health Design
Audio and visible warning beyond preset level
Battery saving design, low voltage indication



GT008-100 Blood Glucose Monitoring System

Measuring range:2.2–27.8mmol/L(40–500mg/dl)
Measuring time:20 seconds
Memory capacities:30
Power source:two replaceable 3–volt batteries(CR2032)
Battery life:≥1000 tests
Life of test strips:
12 months(vial sealed),3 months (after vial opened)
Volume of blood:20
Net weight:52g
Dimensions:97(L) x 55(W) x 15(H)mm

GT008-200

Blood Glucose Meter & Test Strips

I. Features:

- 1. Economy --- low price with good quality.
- 2. Utility --- one key operation, convenience and utility.
- Rapidity --- only one drop of blood, it can come to an accurate result in 20 seconds.
- 4. Multifunction adding --- 30 memory capacitances, easy to check.
- 5. Warranty --- we committed a 5-year free service.

| | . Specifications:

- 1.Measuring Range: 2.2-27.8mmol/L (40-500mg/dl)
- 2. Test Sample: Fresh Capillary Whole Blood
- 3. Sample Size: Approx 3-5 microlitres
- 4. Measuring Time: 20 seconds
- 5. Type A Type C 5. Memory capacitance: 30 results
- 6. Battery Life: ≥ 1000 tests Type A Type C
- 7.Battery low warning: The battery low warning (battery icon) shall occur when the battery voltage is low
- 8. Life of test strips: 18 months (vial sealed),
 - 2 months (after vial being opened)
- 9.Net weight: 44g
- 10. Volume of blood:≥15µl(Type A), about 4µl(Type C)







GT008-300

Blood Glucose Meter & Test Strips

Blood glucose meter is a new meter

- I. Features:
- 1. Multifunction: including the pulse test
- 2. Less Measuring Time: 5 seconds
- 3. More Memory capacitance: 60 results
- 4. Big screen
- 5. Warranty --- we committed a 5-year free service.
- II. Specifications
- 1. Measuring Range: 2.2-27.8 mmol/L (40-500 mg/dl)
- 2. Measuring Time: 5 seconds
- 3. Memory capacitance: 60 results (Advanced)
- 4.Battery Life: ≥1000 tests
- 5. Power Source: Two replaceable 3-volt batteries(AAA)
- 6.Meter Repeatability: sd ≤ 3mg/dl
- 7. Life of test strips: 18 months (vial sealed),
 - 2 months (After vial opened)
- 9. Measuring Rang of PR: 30 bmp~240 bmp
- 10. Measuring Time: 8 seconds

The meter will turn on after you insert a strip, and will shut down automatically in 10 senconds without the input signal





GT130-100 **Electronic Infant Scale** Max. Weighing: 20kg



GT130-200 **Baby Scale** Max. Weighing: 20kg



GT130-300 **Electronic Infant Scale** Max.weighing:20kg Min.value per division:50g



GT130-400 Max.weighing:25kg Min.value per division:100g





GT130-500

Baby Scale

- 1.Tray Size:56X28X9.3cm Body Size:36X29.5X7.5cm Net Size:56X31.5X13.5cm 2.Max.weight:30kg
- 3.Graduation:5g
- 4. Lcd Display+auto Power Off +low Battery Indicator+1 Loadcell
- 5. Precision: +/-1%6. Displayed In Two Units: Kg/Lb/Oz
- 7. Batteres:4xaa(not Included)
- 7.Lcd Size:7*2.8cm



GT131-120 **Health Scale** Max. Weighing: 120kg

Health Scale Max. Weighing: 160kg

Health Scale Max. Weighing: 200kg



GT131-300 Electronic Body Scale Max weighing: 200kg

Division: 100g
Display: LED Power: AC/DC
Height range to be measured: 800–2100mm Min value of height per division: 5mm

G.W.: 15kg N.W.: 13kg Measurement: 100 x 32 x 26cm

GT131-400

Electronic Body Scale

Max weighing: 200kg Division: 100g

Display: LCD Power: AC/DC

Height range to be measured: 800-2100mm

Min value of height per division: 5mm

G.W.: 15kg N.W.: 13kg Measurement: 100 x 32 x 26cm





GT132-101 Bathroom scale

GT132-102 Bathroom scale







GT132-202 Bathroom scale



GT132-203 Bathroom scale

GT132-204 Bathroom scale



GT132-205 Bathroom scale

GT132-206 Bathroom scale





GT135 - 874L Wheel chair Aluminum type

GT135 - 809 Wheel chair Steel type



GT135-909B Wheel chair Steel type



GT135-870ABJ Wheel chair Steel type

MEASUREMENTS(cm) MODEL NO		#		92	Ø	Di	\$	\$	田	円	(Kg)	DIM	NW/GW
GT135-809-41(-46)	60(65)	24	41(46)	59	20	50	87	106	40	45	100	93x24x88	19/ 21
GT135-874L-41	63	28	41	57	15	45	82	100	40	45	100	90x28x85	13/ 15
GT135-909B-41(-46)	56(61)	28	41(46)	60	20	50	94	109	40	45	110	80x28x94	20/ 22
GT135-870ABJ-41(-46)	61(66)	28	41(46)	40	15	45	90	100	40	45	100	82x28x70	15/ 17



GT135-871LB Wheel chair Aluminum type



GT135-952LBC Wheel chair Aluminum type

GT135-874LAH Wheel chair Aluminum type


MEASUREMENTS(cm) MODEL NO		H		9	\$	a जा	Qr.	D .	田	出	(Kg)	DIM	NW/GW
GT135-871LB-41(-46)	58(63)	28	41(46)	40	15	47	89	90	36	40	100	80×28×90	10/ 12
GT135-874LAH-35	58	28	35	52	15	45	85	93	36	45	90	86×28×68	12/ 14
GT135-952LBC	65	35	41	61	15	51	93	106	40	45	120	80x34x94	17/ 19



MEASUREMENTS(cm) MODEL NO		H		\$	\$	ट्या	Q1	D .	田	凸	(Kg)	DIM	NW/GW
GT135-681-46	66	30	44	59	15	50	89	102	44	44	100	75x33x89	23 / 25
GT135-681A-46	66	30	44	59	15	50	95	102	43	51	90	75x33x76	22.6/25.6
GT135-619GC	66		44	58	20	55	129		90	184	100	92x34x92	25.2 / 28.7

Walker







GT136-917L



GT136-915L



GT136-912L



GT136-914L

MODEL Number	LENGTH (cm)	WIDTH (cm)	HEIGHT (cm)	N.W. (Kg)	(Cm)	PCS	G.W (Kg)
GT136-912L	57	60	74.5-92	2.6	58x18x81	2	7
GT136-913L	56	57	74.5-92	2.4	54x18x80	2	6
GT136-914L	52	60	82-92	3.6	60x35x93	2	9.4
3T136-915L	56	60	74.5-92		58x18x81	2	7
GT136-917L(L)	57	42	87-97	1.4	95x68x35	10	16
GT136-917L(M)	57	42	77-87	1.2	85x68x35	10	14
GT136-917L(S)	57	41	67-77		75x68x35	10	12

COMMODE CHAIR - WITHOUT WHEEL







GT136-898

MAIN PARAMETERS

Item Code	耳	Ħ	Ħ	ĴĦ	且	图	N.WT(kg)	DIM	PCS	G.W (kg)
GT136-810	56	46	41-51	74-84	40	33	6	60x32x48	2	13.4
GT136-898	41	38	40		40		1.6	75x30x40	6	10.7



GT137-925L

GT137-928L GT137-938L

GT137-936L

GT137-927L

MODEL Number	HEIGHT (cm)	N.W. (Kg)	(Cm)	PCS	G.W. (Kg)
GT136-925L(L)	128-148	0.9	132x33x29	20	19
GT136-925L(M)	116-136	0.85	119x33x29	20	18
GT136-925L(S)	103-123	0.8	103x33x29	20	17
GT137-927L	82-92	0.3	64x29x16	20	7
GT137-928L	77.5-100	0.3	79x29x18	20	7
GT137-936L	120	0.3	35×20×26	40	13
GT137-938L	77.5-100	0.35	79x34x19	20	8



MODEL Number	HEIGHT (cm)	N.W. (Kg)	(Cm)	PCS	G.W (Kg)
GT137-910L	89	0.3	94x28x15	20	7
GT136-921	72.5–95	0.9	79x34x43	10	10
GT136-922	72.5-95	0.9	60x28x47	10	10
GT136-924	65-87.5	0.8	79x34x43	10	9
GT137-929L	68.5–91	0.3	65x28x15	20	7
GT137-930L	68.5–91	0.3	65x28x15	20	7
GT136-932	80-102.5	0.9	60x28x47	10	10

GT141 Tractor for neck ache




macromolecule foam materials, light.

Tractor for neck ache
Designed for treating and preventing neck
fractured is location of vertebra. Protrusion
of the intervertebral disc and excessive
stretch and draw. It can support the patient's
head efficiently depending on appropriate air
pressure, so that it can release the neck and
shoulder burden. Also it has the magetic infrared
treatment function to dispel the pain.



GT141-110 cervical collar

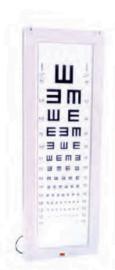

GT142-101

GT142-102

GT142 Luxurious eyesight lamp box

This is served as an apparatus for enghtsight examination in hospitals.

In practical use, it boasts the advantages of soft and comfortable lighting levels and, being made of alluminum materials, it has a very handsome appearance.

There are three styles available-desktop style, wall style and hanging style.

Main Technical data:

Power voltage: AC 220V ± 10%

Frequency: 50Hz Power: 60w





hose flexible lift type, unbending rise or drop. Voltage: AC 220V;

frequency: 50Hz; power: 60W





GT147-101

Single channel automatic electrocardiograph

High resolution thermal printer AC/Reachargeable battery Unique design of rhythm lead LCD Display A C, EMG and DFT Filter Waveform display

GT147-201

12 channel digital electrocardiograph

Features Literature Technical Gallery Main Features

- 1. Design patent issued by the State Intellectual Property Office of China
- Reliable measurement and analysis result contributed by CSE database 3. Software copyright patent of "real-time age-analysis" which ensures
- accurate analysis results issued by the State Intellectual Property Office of China 4. 12.1*color TFT LCD display
- 5. Simultaneous acquisition and display of 12 channel ECG waveforms
- 6. Alphameric keyboard, one touch operation
- 7. Complete digital filters of ADS, EMG, HUM and low-pass
- 8.Freeze function: observe any abnormal ECG waveform
- 9.Pre-10-second printing function: print out any abnormal ECG waveform
- 10.Multi–format printouts
 11.Any lead can be rhythm lead
- 12.Detection and alarm of lead-off and low battery capacity
- 13. Automatic adjustment of baseline for optimal recording

 14. Built-in Help Function: electrode positioning, ECG basic knowledge, common trouble-shooting and so on
- 15.Clinical information such as patient ID, name, gender, age, height, weight, blood pressure, hospital name can be input 16.Maximum 2,000 ECG files can be saved. Saved ECG files can played back or printed out
- 17. Flexible saving interface. Saved ECG files can be displayed in image-text or list format, easy for search
- 18. Auto-save function: after printing, the printed ECG file will be automatically saved to flash or SD card 19. Communicate with PC for ECG data management(option)

Functions of T12 are listed in below table.



GT147-106

Six channel interpretive electrocardiograph

High resolution thermal printer Anti drift filter Multiple print Format AC/Reachargeable battery Simultaneous 12 lad acquisition LCD Display ECG measurement/Interpretation Powerful AC & EMG Filter



GT147-201

GT147-602

Single channel digital electrocadiograph

12-lead simultaneous acquisition

3.8" LCD, real-time display of 12 channel ECG waveforms

Detection and alarm on lead-off and low battery capacity

Automatic adjustment of baseline for optimal printing

Built-in ECG simulator for DEMO purpose

3 kinds of operation mode: AUTO, MAN and ANA

3 kinds of filter: HUM, EMG and ADS

power supply: AC, DC and battery

2 types lead mode: Standard and Cabrera

15 ECG files can be save in the ECG

1,000 ECG files can be save to SD card (Option)

Communication with PC (Option)



GT147-602



GT147-603

GT147-603

Fetal monitor

Main performance

Security:

Anti-shock types: Facilities I, no internal power supply Anti-electric Shock Degree: B Working Voltage: AC 100 V~240 V Frequency: 50 Hz/60 Hz P<60 VA Fuse: T1.6AL250VDisplay Dimensions: 8.0 "color LCD display, folding 60 degree Display Content: bed No., pregnancy weeks, age, paper speed, date, time, volume, alarm status, transducer connection status, recorder status, FHR data and wave, Contraction data and wave, Fetal move times and mark etc.

Print

Record Paper two-double type Z Print Width: 112 mm Valid Print Width: 104 mm Paper output speed: 1 cm/min, 2 cm/min, 3 cm/min(optional) Data Precision: ±5% (X Roll), ±1% (Y Roll) Record Content: hospital, bed No., name, pregnancy weeks, patient No., paper speed, date, time, FHR data and wave, Contraction data and wave, Fetal move times and mark etc.

Ultrasound prohe

Nominal Frequency: 1.0 MHz Work Frequency: 1.0 MHz ± 10 %

Negative peak sound pressure: p_<1 MPa Output beam intensity: lob<20 mW/cm2

The peak time space peak intensity: Ispta<100 mW/cm2
The average time space peak intensity: Isata<10 mW/cm2

FHR Rang: 50 BPM~240 BPM Resolution: 1 BPM Accuracy: ±2 BPM

TOCO

TOCO range: 0~100 % Resolution: 1 % Nonlinear error: < ±10 % RZ way: Manually

Fetal Marking

For the manual button (the operation of pregnant women),

there will be a mark display

in the bottom area of FHR wave display section.

FHR Alarm: Alarm for high and low FHR, which exceeds appointed limit.



GT148-101 ECG Paper

GT148-201

GT148-202

5L barrel pliancy

Technical Parameter

1)pH value: 5.5 ~ 8.0

2)viscosity (25°C): ≥15 Pa.s

3)velocity of sound: 1520 ~ 1620 m/s

4)acoustic impedance:

1.5 × 106 ~ 1.7 × 106 Pa?s/m

5)acoustic attenuation:

<0.1 dB/(cm ⋅ MHz)

GT147-50D+

Fingertip oximeter
Display Mode: 0.96" Dual-color OLED display(blue and yellow)
Screen Resolution: 128'64
SpO2 Measuring Range: 0% ~ 100%, (the resolution is 1%).
Accuracy: 70% ~ 100%: ±2%, Below 70% unspecified.
PR Measuring Range: 30bpm ~ 250bpm, (the resolution is 1bpm)
Accuracy: ±2bpm or ±2% (select larger)
Measurement Performance in Weak Filling Condition:SpO2 and
pulse rate can be shown correctly when pulse-filling ratio is 0.4%.
SpO2 error is ±4%, pulse rate error is ±2 bpm or ±2% (select larger).
Resistance to surrounding light: The deviation between the value
measured in the condition of man-made light or indoor natural light
and that of darkroom is less than ±1%
Power Consumption: less than 30mA
Voltage: DC 2.6V~3.6V
Power Supply:1.5V (AAA size) alkaline batteries × 2
Battery working hour: Theoretical number is 32 hours.
Safety Type:Interior Battery, BF Type

Sell in standard:

A hanging rope A user manual A data line A disk (PC software) Sell in addition: RF wireless module Oximeter probe (Refer to probe application

instruction for details and notice renewal) Physical Identity

Dimension: 58.5(L) × 31(W) × 32 (H) mm Weight: About 52g (with the batteries)

GT147-60D

Handheld oximeter Measurement Range:0 ~ 100%

Measurement Hange:0 ~ 100%
Resolution:1%
Accuracy: ±2%(70%~100%,
Adult/Pediatric, non-motion)
±3%(70%~100%, Neonate, non-motion)
0% ~ 69% unspecified
Alarm Range:0% ~ 100%
Refreshing Rate:1s
Pulse Rate:
Measurement Range:25 ~ 250 hpm Measurement Range:25 ~ 250 bpm Resolution:1bpm Accuracy: ±3 bpm (non-motion) Alarm Rango:25 ~ 250 bmp Refreshing Rate:1s

Sell in standard: A user manual

A data line

A disk (PC software)

An oximeter probe

Sell in addition:

Other oximeter probe (Refer to probe application instruction for details and notice renewal)

Physical Identity

Dimension: $110(L) \times 60(W) \times 23(H)$ mm Weight: About 180g (with Alkaline battery2AA)

GT147-50DL

Fingertip oximeter

LED display

SPO2:35~99% pluse ratio:30-250BPM Resolution: 1% for SPO2, 1BPM for pulse ratio Accuracy: ±2% (70% ~99%), unspecified (<70%) for SPO2, ±2BPM or ±2% (select larger) for pulse ratio Power: 1.5V (AAA size) alkaline batteries x 2 Can work more than 30hours continuously Interference resistance capacity against ambient light and

Sell in standard:

A hanging rope A user manual

Physical Identity

Dimension: $61(L) \times 36(W) \times 32(H)$ mm Weight: About 50g (with the batteries)

measurement performance at low perfusion



GT147-901

Handhold ECG Monitor

Main Function

Direct collection of ECG on chest, realtime refresh of display and memory Frozen and extended display during ECG collection and replay Character display of ECG parameter(HR,QRS, RH, P-R) Rhythm classification with Multi-Language and alarm in dangerous Display of heart beating peried histogram in order and random Storage and accese of typical ECG segments Output port can be connected to any ECG

machine or micro-printer to get record



GT151-101

Electronic spirometer

Test range: Vc:0 ~ 9999mL Accuracy: ≤ ±5% (F.S) Working environment: 5 ~ 40°C Relative humidity: ≤80%RH Power: 220V(or 2 AA battery)



GT151-102

Electronic spirometer

vital capacity: $Vc:0 \sim 10L$ accuracy: $\leq \pm 5\%$ (F.S) tidal volume: $0.10 \sim 2.00L$ accuracy: $\leq \pm 5\%$ (F.S)

Max. voluntary ventilation/min :0 ~ 200L/min

accuracy: $\leq \pm 5\%$ (F.S.) Working environment: $5 \sim 40\%$ relative humidity: $\leq 80\%$ RH

power:220v



GT151-103

Electronic spirometer

vital capacity: $Vc:0 \sim 10L$ accuracy: $\leq \pm 5\%$ (F.S) tidal volume: $0.10 \sim 2.00L$ accuracy: $\leq \pm 5\%$ (F.S)

Max. voluntary ventilation/min:0~200L/min

accuracy: $\le \pm 5\%$ (F.S.) Working environment: $5 \sim 40\%$ relative humidity: $\le 80\%$ RH

power:220v

GT149-204

Compressor nebulizer

This equipment sprayed liquid medication to fog panel by compressing air, and form tiny particles, which flow into the throat through imbibing tube. It adopts oil–free–high–efficiency valve with no need for daily lubrication and it is with low noise, tiny particles. It is an ideal product for family and medical units' use. Principle technical date:

Maximum compressor pressure: ≥0.15 Mpa Compressor free air flow: ≥10 L/MIN Maximum nebulizatiion rate: ≥0.2 ML/MIN

Power:< 150 VA



GT149-205

Compressor nebulizer

This equipment sprayed liquid medication to fog panel by compressing air, and form tiny particles, which flow into the throat through imbibing tube. It adopts oil–free–high–efficiency valve with no need for daily lubrication and it is with low noise, tiny particles.

It is an ideal product for family and medical units' use Powerful piston pump is efficient, dependable and quiet. Comes complete with ampule for nebulizing, mouth piece, tubing and user manual.

Principle technical date:

New, lightweight portable design: ≤ 2.0 KG

Electric requirements: $AC220 \pm 22V$ $50Hz \pm 1Hz$

Maximum compressor pressure: ≥0.15 Mpa

Compressor free air flow: ≥10 L/MIN

Maximum nebulizatiion rate: ≥0.2 ML/MIN

Sound level: ≤65 dB (A)

Power:<150 VA





GT149-206

Nebulizer series

Atomizer adopts ali-transistor circuitry,passes through eletron coupling oscillating circuit it,produces ultrasonic. The ultrasonic makes water soluble medincine become ting partices by aquecles medium. It reaches user's mouth by mouth piece and mask.

Features: various IISes,more suitablefor home use

- This product is suitable for the surroundings, which need faint scent or disinfectant, or increasing humidity.
- Facial cleaning & beauty care: Applying over 1MHz ultrasonic nebulized mist to clean the face is very effective, and it is a usual skin care method, very convenient and comfortable.
- 3, Jewelry cleaning: Immerse the jewelry in the detergent and then turn on the machine. The grease and dirt can be removed from the jewelry after 10 minutes.



Principal technical data:

Voltage: AC220V 50Hz

Power: 45VA

Ultrasonic frequency: 1.7MHz ± 10%

Max nebulizing rate: ;;:3ml/min

Timing range: O- 60min no adjustable range

Continuous load time: ;;:4h Madication cup capacity: ;;:150ml



GT149-101

Ultrasonic nebulizer

Max capacity of medicine cup: 50ml; Capacity of water trough: 250ml Nebulizing amount: 3ml/min-5ml/min



GT149-201

Compressor nebulizer

Max capacity of medicine cup: 10ml

Nebulizer rate: 0.4ml/min

Particle size rate: 5.2 μ m (MMD*) Residual of a medicine: 0.5 mi

Noise: 56dB(A)



GT149-202

Compressor nebulizer

Max capacity of medicine cup: 5ml

Nebulizer rate: 0.2ml/min

Particle size rate: 2.5 μ m (MMD*) Residual of a medicine: 0.5 mi

Noise: 50dB(A)



GT-149-203

Handholding Style Ultrasonic Nebulizer AC and DC Commutable

Max capacity of medicine cup: 10ml Capacity of water trough: 50ml Nebulizing amount: 1ml/min-2ml/min Gross weight of single package: 1000g, 10in one package



GT150-300

Urine Analyzer

Main technical:

Testing items: GLU, BIL, SG, KET, BLD, PRO, URO, NIT, LEU, Ve, PH value

Testing wavelength: 550nm, 620nm, 720nm

Testing speed: 144 pieces/hour

Data storage: storage of no less than 3000 sample data, free query in term of testing data and sample number

Reaction time: 25-30 seconds

Printer: built-in high-speed, temperature sense printer Power supply: 220V ± 22V 50Hz ± 1Hz



GT146-101

Characteristics:

- 1. Fully stainless steel structure.
- 2. Double scale indication pressure gauge.
- 3. Electric heated.
- 4. Easy to operate, safe and reliable



GT146-102

Vertical pressure steam sterilizer Characteristics:

- 1. Fully stainless steel structure
- 2. Hand wheel type of quick-open door structure
- 3. Door safety lock system
- 4. Automatically controlled by computer
- 5. Digital display of working status, touch of key
- 6. Over temperature & over pressure auto-protection
- 7.Steam-water inner circulation system:no steam discharge, and the environment for sterilizing will be clean and dry
- 8.Self-inflating type seal
- 9.Safe protection of water lacking 10.The drying system is optional, which can be equipped according to the customers' request
- 11. Automatically shut off with beep reminding after sterilization
- 12. With two stainless steel sterilizing baskets



GT146-103

Vertical pressure steam sterilizer Characteristics:

- 1.Fully stainless steel structure
- 2. Hand wheel type of quick-open door structure
- 3.Door safety lock system
- 4. Automatically controlled by computer
- 5. Digital display of working status, touch of key
- 6. Over temperature & over pressure auto-protection
- 7.Steam-water inner circulation system:no steam discharge, and the environment for sterilizing will be clean and dry 8.Self-inflating type seal
- 9. Safe protection of water lacking
- 10. The drying system is optional, which can be equipped according to the customers' request
- 11. Automatically shut off with beep reminding after sterilization
- 12. With two stainless steel sterilizing baskets



GT146-104


Horizontal Cylindrical Pressure Steam Sterilizer

- 1. Sterilizing course automatic sterilization controlled, easy to operate.
- 2. With drying function, suitable dressing drying.
- 3. With over-temperature, over-pressure auto-protect device.
- 4. The door opening mechanism cannot be operated until the pressure in the chamber is reduced to 0.027MPa. It can't be start on if the door doesn't close well.
- 5. The safety value will be open automatically when the inner pressure over 0.24MPa, and the steam be exhausting to the water tank.
- 6. The power will be cut-off automatically, cut-off the water and alarm when the machine lacking water.
- 7. The chamber of the sterilizer is made of stainless steel.










GT151-107 Oxygen absorber







GT151-109 Oxygen absorber

Model	Service Medium	Max.dischange pressure	Max.dischange pressure	Nominal Flow Rate	Precision class	Inlet Connection	Outer Connection
GT151-104	Oxygen	200Kg/cm²	0.2-0.3 Mpa	1–10L/min	4 Class	CGA540	M10X1-RH(M
GT151-107	Oxygen	150Kg/cm ²	0.2-0.3 Mpa	1-15L/min	4 Class	G5/8"-RH(F)/ CGA540	M10X1-RH(M
GT151-108	Oxygen	150Kg/cm ²	0.2-0.3 Mpa	1-15L/min	4 Class	G5/8"-RH(F)/ CGA540	9/16-18RH(M
AT151-109	Oxygen	200Kg/cm²	0.2-0.3 Mpa	1-10L/min	4 Class	G5/8"-RH(F)/	M10X1-RH(M



GT138-106 PP material size:32 x 23.8 x 8.5cm 110g

GT138-107 PE material, 1000cc, size:32 x 21 x 10.5cm 60g

GT138-108PP material, size:36.5 x 28 x 10.6cm 180g

GT138-109PE material, size: 34 x 26.5 x 9cm 300g



GT138-110 PP material, size: 34oz, 230g



GT138-111 PP material, size: Up-dia:12.2cm, Bottom-dia:9.3cm, H:16.3,63g



GT138-112 PE material, size: Up-dia:11.5cm, Bottom-dia:8, H:13.6cm, capacity:800ml,13g



GT138-113 PP material, size: 51 x 28 x 9cm 500g



GT138-114 News paper size: 25.5 x 11.5 x 11cm



GT138-115 News paper size: 25 x 11 x 10.8cm



GT138-116 PP material, size: 25 x 10 x 4.9cm 25g







TU SOCIO DE CONFIANZA EN EL SECTOR SOCIOSANITARIO.



- www.sifammedical.com
- 900 447 447
- **673 301 127**