




# Sifam

## Medical

Catálogo

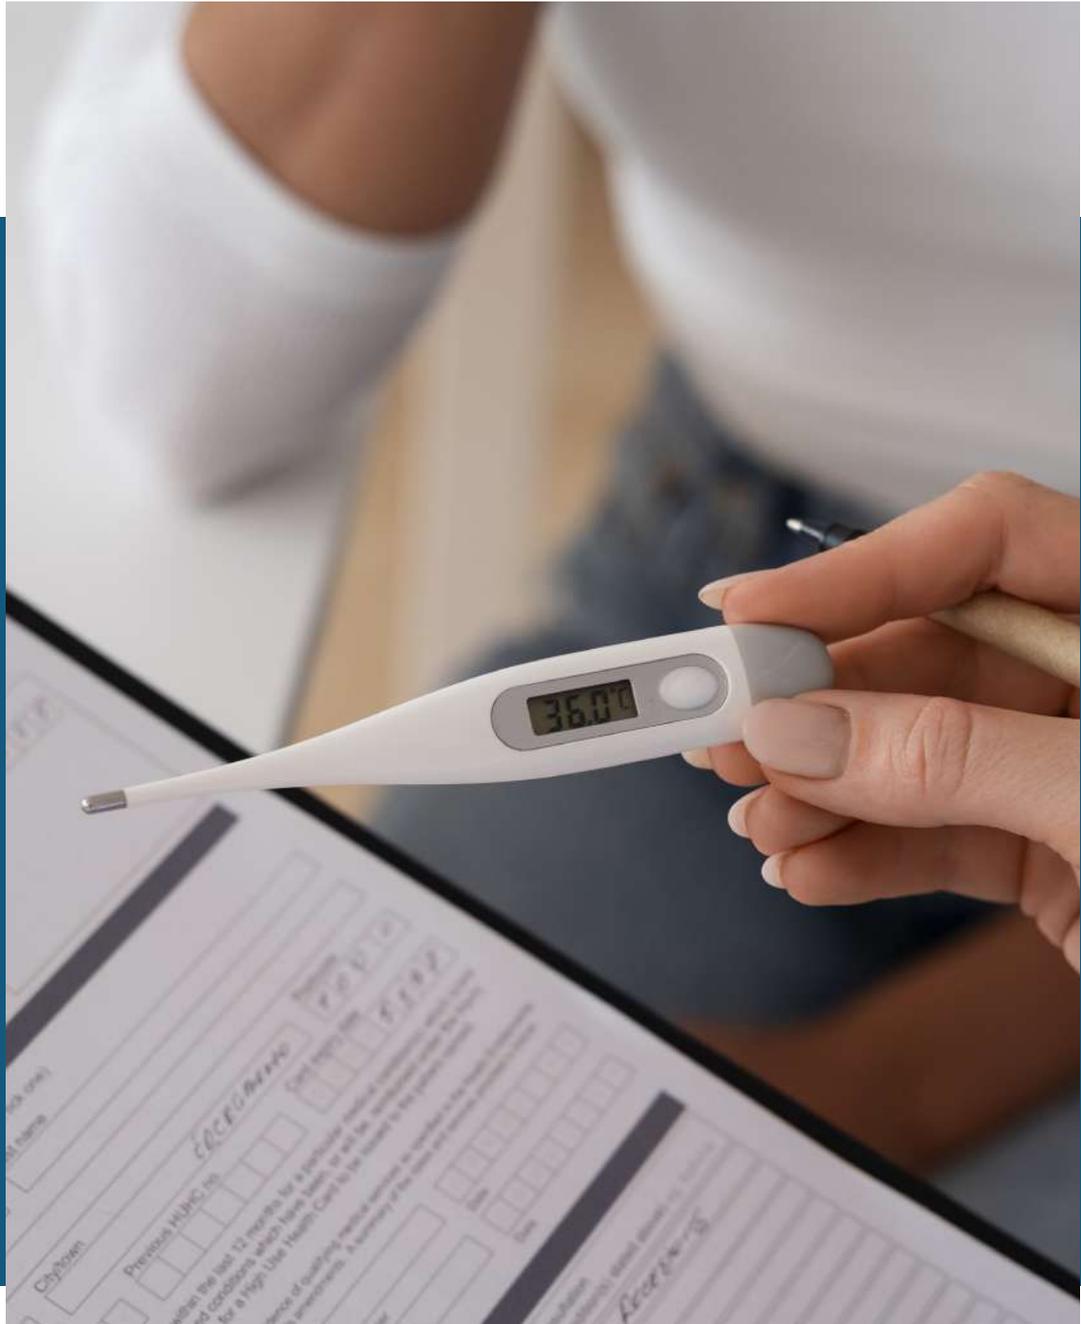

Productos de diagnóstico

A photograph of medical professionals in a clinical setting. In the foreground, a person's hands in blue gloves are shown holding a clear plastic container with a green tube inside. In the background, a woman in a white lab coat and blue gloves is working with a syringe. To the right, a man in a white lab coat and blue gloves is holding a blue clipboard. The scene is dimly lit, with a focus on the hands and the medical equipment.

# PRODUCTOS SOCIOSANITARIOS DE ALTA CALIDAD

En SIFAM Medical ofrecemos soluciones socio-sanitarias de primer nivel que mejoran la calidad de vida de los pacientes y facilitan el trabajo de los profesionales de la salud. Descubre nuestra amplia gama de productos diseñados para cumplir con las más altas exigencias del sector.

# PRODUCTOS DE DIAGNÓSTICO

Equipos de diagnóstico diseñados para proporcionar datos fiables y precisos, fundamentales en la práctica médica diaria. Ofrecemos una amplia gama de herramientas de alta calidad para diversas especialidades.





**PRODUCTOS DE  
DIAGNÓSTICO  
SPHYGMOMANOMETER**



### ***Aneroid Sphygmomanometer***

300mmHg Gauge  
Cotton or Nylon cuff  
With or without D-ring is available  
Artery label  
Vinyl or Nylon zippered carrying case

**GT001-101**

Aneroid  
Sphygmomanometer



**GT001-110**

Aneroid Sphygmomanometer  
With Separate Single Head Stethoscope



**GT001-111**

Aneroid Sphygmomanometer  
with Attached Single Head Stethoscope

**GT001-120**

Palm Type Aneroid Sphygmomanometer  
Plastic Shell  
65mm Diameter dial



**GT001-121**

Palm Type Aneroid Sphygmomanometer  
Metal Shell  
65mm Diameter dial



## Productos de Diagnóstico



### GT001-122

Palm Type Aneroid Sphygmomanometer  
Metal Shell  
50mm Diameter dial



### GT001-123

Palm Type Aneroid Sphygmomanometer  
Metal Shell  
65mm Diameter dial



### GT001-124

Palm Type Aneroid Sphygmomanometer  
Metal Shell  
50mm Diameter dial



### GT001-125

Palm Type Aneroid Sphygmomanometer  
Plastic Shell  
65mm Diameter dial



### GT001-126

Palm Type Aneroid Sphygmomanometer  
Plastic Shell  
55mm Diameter dial

## Productos de Diagnóstico



**GT001-130**

Arm Type  
Aneroid Sphygmomanometer

**GT001-140**

White plastic cover Type  
Aneroid Sphygmomanometer



**GT001-150**

Desk Type  
Aneroid Sphygmomanometer



**GT001-160**

Wall Type  
Aneroid Sphygmomanometer

## GT001-127

### Five Size Blood Pressure Kit

1PC Palm Type Aneroid Sphygmomanometer Gauge

5Pcs Sizes Cuff with latex baladder & quick release

luer adapter:

1PC Infant Cuff: 28cm x8cm

1PC Child Cuff: 34.5cm x11cm

1PC Adult Cuff: 50.8cm x14cm

1PC Large Cuff: 63cm x17.5cm

1PC Thigh Cuff: 72cm x21cm

1Pc Penlight

1PC Dual head Stethoscope

1Pc Neurological Hammer

1Pc Nylon Carrying Case

**Form of packing:**

10pcs/carton

Size of packing:

Export carton:600x420x300mm



## GT001-170

### Floor Type Aneroid Sphygmomanometer

**Form of packing:**

One machine fill in a white box, and every one boxes in one export carton.


**Size of packing:**

White box:495x460x170mm

Export carton:500x470x185mm

## Mercury Sphygmomanometer

300mmHg scale glass tubes  
Metal case  
Cotton or nylon cuff,  
With or without D-ring is available  
Artery label  
Latex bladder with double tubes

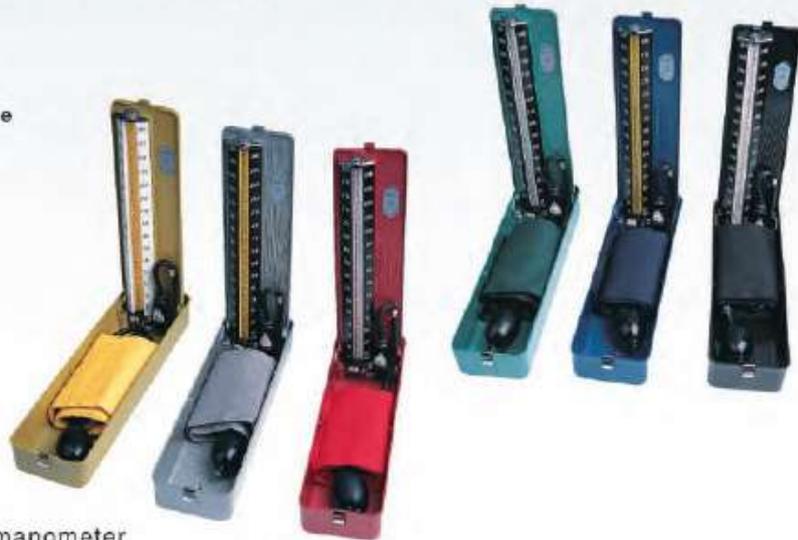

### GT001-200

Professional Mercury Sphygmomanometer  
Desk type



GT001-201  
LCD Display



GT001-202  
Light Display



GT001-210  
Mercury Sphygmomanometer  
Wall Type



GT001-220  
Mercury Sphygmomanometer  
Floor Type

*Accessories*



**GT001-401**  
Zipper Case



**GT001-403**  
Bladder



**GT001-404**  
Bulb



**GT001-402**  
Cuff



**GT001-405**  
Air-release Valve

**GT001-406**  
End Valve



**GT001-407** Cuff  
Material: Nylon or cotton

## ***Fully automatic electronic blood pressure monitor***

Display system: Digital display system/LCD

Measuring range: 2.7kpa-40kpa(20mmHg-300mmHg)

Accuracy: 0.5kPa(4mmHg)

Power source: Type AA batteries\*4 for arm type

Type AA batteries\*2 for wrist type

Operating environment: -5°C less than 95RH

Automatic power off: To be automatically cut off after few minutes of non use to save energy



**GT001-301**

Arm type



**GT001-302**

Arm type



**GT001-303**

Arm type



**GT001-311**

Wrist type



**GT001-312**

Wrist type



**GT001-313**

Wrist type



**PRODUCTOS DE  
DIAGNÓSTICO  
STETHOSCOPE**

## *Single head stethoscope*

Oxided or Anodized Aluminum chest piece

Brass Chrome Plated Binaural

Plastic eartips

All kinds of color available for the tube such as: Black, Red, Green, Yellow, Blue, Purple, Pink, Grey, White, etc.



**GT002-100**

Single head stethoscope  
Silver chest piece



**GT002-110**

Single Head Stethoscope  
Colored chest piece & Binaural



**GT002-130**

Single head stethoscope  
with plastic ring



**Productos de Diagnóstico**



**GT002-120**  
Pediatric Single head Stethoscope



**GT002-140**  
**GT002-141**

**Deluxe Special Single head Stethoscope**  
Zinc alloy chest piece with  
chrome plated silver finish



**GT002-150**  
Bowles stethoscope  
Chromeplated chest piece



**GT002-160**  
Disposable Single Head Stethoscope  
Plastic

***Dual head stethoscope***

**Oxidized or Anodized Aluminum chest piece**

**Brass Chrome Plated Binaural**

**Plastic or soft eartips**

**All kinds of color available for the tube such as: Black, Red, Green, Yellow, Blue, Purple, Pink, Grey, White, etc.**



**GT002-200**

Dual head stethoscope  
Silver chest piece



**GT002-210**

Dual head stethoscope  
Colored chest piece & Binaural



**GT002-220**

Pediatric Dual Head Stethoscope



**GT002-261**

Teaching use dual head stethoscope

## Productos de Diagnóstico



**GT002-230**  
Neonatal Dual Head Stethoscope

**GT002-240**  
Dual head stethoscope  
with non-chill ring  
with soft eartips



**GT002-250**  
Dual head stethoscope  
with non-chill ring  
with soft eartips



**GT002-260**  
Teaching Use Dual head stethoscope

## ***Stainless Steel Stethoscope***

Stainless Steel chest piece

Stainless Steel Binaural

Plastic & soft eartips

With non-chill rims

Spare diaphragm included

All kinds of color available for the tube such as: Black, Red, Green, Blue, Pink, Grey, etc.



**GT002-270**

Stainless Steel Stethoscope  
Adult type  
ingle - lumen tubing



**GT002-280**

Stainless Steel Stethoscope  
Child type



**GT002-290**

Stainless Steel Stethoscope  
Cardiology type



**GT002-291**

Stainless Steel Stethoscope  
Cardiology type

## *Sprague Rappaport Stethoscope*

Sprague Rappaport type chest piece  
**Brass Chrome Plated Binaural**  
Plastic or soft eartips  
All kinds of color available for the tube such  
as: **Black, Red, Green, Yellow, Blue, Purple, Pink, Grey, etc.**  
2sets of earplug, 1set of mebrane,  
1pc of Large chest piece,  
1pc of Middle chest piece,  
1pc of Small chest piece



**GT002-300**  
Sprague Rappaport Stethoscope  
Silver color chest piece



**GT002-310**  
Sprague Rappaport Stethoscope  
Colored chest piece



**GT002-320**  
Sprague Rappaport Stethoscope  
Transparent tube



**Fetal Stethoscope**  
**GT002-400** Metal type  
**GT002-410** Pinard plastic type in white

# Productos de Diagnóstico



**GT002-960A**  
Name tag



**GT002-960B**



**GT002-293**  
Earplug



**GT002-294**  
Single head stethoscope  
Acrylic head,  
pvc tube and aluminum earloop



**GT002-295**  
Stethoscope  
Dia of cover:4.6cm  
Thickness of cover:0.8mm

# Productos de Diagnóstico



## GT003-100

### Buck Neurological Hammer

hammerhead: zinc alloy with rubber plug  
 handle: nylon  
 with needle: zinc alloy, with brush  
 length of hammer: 22.5cm  
 height of hammer head: 8.5cm



## GT003-200

### Gear Wheel Hammer

hammerhead: zinc alloy  
 handle: zinc alloy



## GT003-300

### Taylor Hammer

Length of handle: 18cm  
 Size of rubber plug: 5 X 4.3 X 1cm  
 thickness of rubber plug: 1.5cm



## GT003-GF05B

### Colorflex reflex hammer

hammerhead: rubber with copper ring  
 handle: nylon  
 length of hammer: 22.5cm  
 height of hammerhead: 7.5cm



## GT003-400

### Babinski (Adult) with Telescoping Handle

hammerhead: zinc alloy with rubber plug  
 handle: zinc alloy  
 length of handle: 21cm  
 diameter of hammerhead: 4.5cm  
 thickness: 1cm



## GT003-500

### Gristletly Hammer

Rubber plug  
 hammerhead: copper  
 handle: steel  
 length of hammer: 24cm  
 diameter of hammerhead: 4.5cm



## GT006-100

Diagnostic Pen Light

## GT006-200

Diagnostic Pen Light

# Productos de Diagnóstico



## GT054-200 Tourniquet

- |              |                         |
|--------------|-------------------------|
| GT054-200-D  | GF03D, 45x2.5cm         |
| GT054-200-C  | GF03C, Kids, 38.5x2.5cm |
| GT054-200-F  | GF03F, 45x2.5cm         |
| GT054-200-KA | GF03KA, 45x2.5cm        |
| GT054-200-H  | GF03H, 45x2.5cm         |

## GT007-200 Altimeter device Max height: 2meters



## GT143-100 Sound gear Material: steel



## GT143-101 F256 tuning fork Material: steel



## GT143-102 Resonance tuning fork



## GT143-103 F512 tuning fork Material: steel

# Productos de Diagnóstico



## GT003-100

### Buck Neurological Hammer

hammerhead: zinc alloy with rubber plug  
 handle: nylon  
 with needle: zinc alloy, with brush  
 length of hammer: 22.5cm  
 height of hammer head: 8.5cm



## GT003-200

### Gear Wheel Hammer

hammerhead: zinc alloy  
 handle: zinc alloy



## GT003-300

### Taylor Hammer

Length of handle: 18cm  
 Size of rubber plug: 5 X 4.3 X 1cm  
 thickness of rubber plug: 1.5cm



## GT003-GF05B

### Colorflex reflex hammer

hammerhead: rubber with copper ring  
 handle: nylon  
 length of hammer: 22.5cm  
 height of hammerhead: 7.5cm



## GT003-400

### Babinski (Adult) with Telescoping Handle

hammerhead: zinc alloy with rubber plug  
 handle: zinc alloy  
 length of handle: 21cm  
 diameter of hammerhead: 4.5cm  
 thickness: 1cm



## GT003-500

### Gristletly Hammer

Rubber plug  
 hammerhead: copper  
 handle: steel  
 length of hammer: 24cm  
 diameter of hammerhead: 4.5cm



## GT006-100

Diagnostic Pen Light

## GT006-200

Diagnostic Pen Light

# Productos de Diagnóstico



## GT054-200 Tourniquet

- |              |                         |
|--------------|-------------------------|
| GT054-200-D  | GF03D, 45x2.5cm         |
| GT054-200-C  | GF03C, Kids, 38.5x2.5cm |
| GT054-200-F  | GF03F, 45x2.5cm         |
| GT054-200-KA | GF03KA, 45x2.5cm        |
| GT054-200-H  | GF03H, 45x2.5cm         |

## GT007-200 Altimeter device Max height: 2meters



## GT143-100 Sound gear Material: steel



## GT143-101 F256 tuning fork Material: steel



## GT143-102 Resonance tuning fork



## GT143-103 F512 tuning fork Material: steel



**GT005-100 ENT Kit**

- Ophthalmoscope-1
- Otoscope carrier-1
- Ear specula(3,4,5,6mm diam)-4
- Nasal apeculum(8mm diam)
- Dilating Nasal speculum-1
- Laryngeal mirror stem-1
- Laryngeal Mirrors-3
- Tongue depressor plastic-1
- Battery handle-1
- Spare Bulbs(2large,4small)-6



**GT005-101**

**Professional otoscope**

**Features**

Fiberoptics for cool, obstruction free light transmission  
 Otoscope head made from polymid – an impact resistant space age thermoplastic  
 Swivelling viewing window with 2.5x magnification  
 "AA" polycarbonate battery handle interchanges pocket clip with intergral on/off slide switch for ambidextrous use

**Technical data**

magnification: 2.5x  
 distal dia: 2.5mm, 4mm  
 Bulb: 2.5V 1.6W halogen lamp  
 Batteries: two "AA" batteries or two "AA" NiMH Rechargeable Battery



**GT005-102**

Otoscope  
 deluxe packing : penlight,  
 part of otoscope,batteries



**GT005-200**

**Reflex hammer gifts set**

buck neurological hammer  
 babinski with telescoping handle  
 taylor hammer



**GT005-103**

Otoscope  
 deluxe packing : penlight,  
 part of otoscope,batteries



**GT005-201**

Buck neurological hammer  
 gear wheel hammer  
 taylor hammer  
 cruet hammer



## GT005-202

Buck neurological hammer  
gear wheel hammer  
taylor hammer  
gristlely hammer  
babinski telescoping handle

## GT005-204

Fiber laryngeal mitrrior  
Power suply: 1.5V x 2 "C" type  
Bulb: 2.5V / 0.35A  
Blades: 92、114、134mm



## GT005-302

### BO monitor Gift Set

the gift set including the following products :

- 1set BP monitor
- 1pc reflex hammer
- 1pc penlight
- 1pc dual head stethoscope
- 1pc thermometer



## GT040-500

### Disposabele electro-surgical pencil

- 1.170mm-ABS pencil appearance
- 2.7cm Stainless Steel tip
- 3.2.36mm-diameter of the tip
- 4.3m-PVC medical cable
- 5.Maximal output current: 1A
- 6.Frequency confine:0-1.0MHZ
- 7.Ways of aseptic technique: Sterile EO
- 8.Current resistance:200Ω
- 9.Term of sterility:3 years
- 10.Package: 100PCS/Cartron

## Digital Thermometer

Pen type, 3-Digital  
 Scale: °C or °F  
 Accuracy:  $\pm 0.1^{\circ}\text{C}$  ( $\pm 0.2^{\circ}\text{F}$ )  
 Min Scale:  $0.1^{\circ}\text{C}$   
 Memory function: last temperature  
 Measuring times: 2 minutes  
 Beeper function  
 Auto shut-off



### GT004-201

Display range:  $32.0^{\circ}\text{C}\sim 42.0^{\circ}\text{C}$ ,  
 $89.6^{\circ}\text{F}\sim 107.6^{\circ}\text{F}$   
 Accuracy:  $\pm 0.1^{\circ}\text{C}$ ,  $\pm 0.2^{\circ}\text{F}$   
 Min Scale:  $0.1^{\circ}\text{C}$  /  $0.1^{\circ}\text{F}$   
 Response: 60 seconds  
 size: 127 x 18 x 10 mm  
 LCD: 15.5 x 6.5 mm  
 N.W.: 10.5g



### GT004-202

**Large LCD display**  
 Display range:  $32.0^{\circ}\text{C}\sim 42.0^{\circ}\text{C}$ ,  
 $89.6^{\circ}\text{F}\sim 107.6^{\circ}\text{F}$   
 Accuracy:  $\pm 0.1^{\circ}\text{C}$ ,  $\pm 0.2^{\circ}\text{F}$   
 Min Scale:  $0.1^{\circ}\text{C}$  /  $0.1^{\circ}\text{F}$   
 Response: 60 seconds  
 size: 122 x 17 x 10 mm  
 LCD: 20 x 7.5 mm  
 N.W.: 9.5g



**GT004-141**  
 Cover for  
 mercury thermometer



**GT004-142**  
 Cover for  
 digital thermometer



### GT004-203

**Digital thermometer**  
**Without waterproof function**  
**hard tip**

Temperature range:  $32.0^{\circ}\text{C}\sim 49.0^{\circ}\text{C}$ ,  
 Accuracy:  $\pm 0.1^{\circ}\text{C}$   
 Display mode: LCD (three and a half)  
 Power: 0.15mW(working)  
 Battery: AG31.5V ordinary button battery  
 Sound Tip: beep after measurement  
 Raw material: ABS plastic



## GT004-204

**Digital thermometer**  
**Soft tip**  
**waterproof**

Temperature range: 32.0°C~42.9°C,  
Accuracy:  $\pm 0.1^{\circ}\text{C}$   
Display mode: LCD (three and a half)  
Power: 0.15mW(working)  
Battery: AG31.5V ordinary button battery  
Sound Tip: beep after measurement  
Raw material: ABS plastic



## GT004-205

**Transparent**

Display range: 32.0°C~42.0°C,  
89.6°F~107.6°F  
Accuracy:  $\pm 0.1^{\circ}\text{C}$ ,  $\pm 0.2^{\circ}\text{F}$   
Min Scale: 0.1°C / 0.1°F  
Response: 60 seconds  
size: 127 x 18 x 10 mm  
LCD: 17.5 x 7.5 mm  
N.W.: 10.5g



## GT004-206

Display range: 32.0°C~42.0°C,  
89.6°F~107.6°F  
Accuracy:  $\pm 0.1^{\circ}\text{C}$ ,  $\pm 0.2^{\circ}\text{F}$   
Min Scale: 0.1°C / 0.1°F  
Response: 60 seconds  
size: 127 x 18 x 10 mm  
LCD: 16.5 x 7 mm  
N.W.: 10.5g

## GT004-207

60" temperature taking lead time.  
9 minutes Auto Off  
Fever alarm  
Memory of last reading  
0.1 resolution  
Bi-Bi signal after measurement finished  
LCD size at 18 x 9.4 mm  
Waterproof available at additional cost



## GT004-210

### Digital Thermometer

Pen type, 4-Digital  
Scale: °C  
Accuracy:  $\pm 0.05^{\circ}\text{C}$   
Min Scale:  $0.01^{\circ}\text{C}$   
Memory function: last temperature  
Measuring times: 2 minutes  
Beeper function  
Auto shut-off



## GT004-220    GT004-221

### Water Resistance Digital Thermometer

Pen type, 3-Digital  
Scale: °C or °F  
Accuracy:  $\pm 0.1^{\circ}\text{C}$  ( $\pm 0.2^{\circ}\text{F}$ )  
Min Scale:  $0.1^{\circ}\text{C}$   
Memory function: last temperature  
Measuring times: 2 minutes  
Beeper function  
Auto shut-off



GT004-220



GT004-221



**GT004-222**

**Water-proof**

Display range: 32.0°C~42.0°C,  
89.6°F~107.6°F

Accuracy:  $\pm 0.1^{\circ}\text{C}$ ,  $\pm 0.2^{\circ}\text{F}$

Min Scale: 0.1°C / 0.1°F

Response: 60 seconds

size: 127 x 18 x 10 mm

LCD: 17.5 x 7.5 mm

N.W.: 10.5g



**GT004-223**

**High accuracy**

**Large LCD display**

**Water-proof**

Display range: 32.0°C~43.0°C,  
89.6°F~109.4°F

Accuracy:  $\pm 0.1^{\circ}\text{C}$ ,  $\pm 0.2^{\circ}\text{F}$

Min Scale: 0.01°C / 0.01°F

Response: 60 seconds

size: 133 x 18 x 13 mm

LCD: 20 x 7 mm

N.W.: 9g



**GT004-230**

**Flexible Tip Digital Thermometer**

Pen type, 3-Digital

Scale: °C or °F

Accuracy:  $\pm 0.1^{\circ}\text{C}$  ( $\pm 0.2^{\circ}\text{F}$ )

Min Scale: 0.1°C

Memory function: last temperature

Measuring times: 2 minutes

Beeper function

Auto shut-off

## GT004-231

**Flexible probe**  
**Water-proof**  
**Large LCD display**

Display range: 32.0°C~42.0°C,  
89.6°F~107.6°F

Accuracy:  $\pm 0.1^{\circ}\text{C}$ ,  $\pm 0.2^{\circ}\text{F}$

Min Scale: 0.1°C / 0.1°F

Response: 60 seconds

size: 126 x 18 x 10 mm

LCD: 20 x 7 mm

N.W.: 11.5g



## GT004-232

**Flexible probe**  
**Water-proof**  
**Large LCD display**

Display range: 32.0°C~42.0°C,  
89.6°F~107.6°F

Accuracy:  $\pm 0.1^{\circ}\text{C}$ ,  $\pm 0.2^{\circ}\text{F}$

Min Scale: 0.1°C / 0.1°F

Response: 60 seconds

size: 125 x 20 x 11 mm

LCD: 20 x 7 mm

N.W.: 11.5g



## GT004-233

**Flexible probe**  
**Water-proof**  
**Large LCD display**

Flexible tip more safe suit for baby;

60" temperature taking lead time.

9 minutes Auto Off

Fever alarm

Memory of last reading

0.1 resolution

Bi-Bi signal after measurement finished

LCD size at 18 x 9.4 mm

Water-resistant available at additional cost





**GT004-260**

**Fast reading  
Large LCD display**

Display range: 32.0°C~42.0°C,  
89.6°F~107.6°F

Accuracy:  $\pm 0.1^{\circ}\text{C}$ ,  $\pm 0.2^{\circ}\text{F}$

Min Scale: 0.1°C / 0.1°F

Response: 10 seconds

size: 134 x 22 x 14 mm

LCD: 20.7 x 7 mm

N.W.: 12.5g



**GT004-261**

**Fast reading / Water-proof  
Large LCD display**

Display range: 32.0°C~42.0°C,  
89.6°F~107.6°F

Accuracy:  $\pm 0.1^{\circ}\text{C}$ ,  $\pm 0.2^{\circ}\text{F}$

Min Scale: 0.1°C / 0.1°F

Response: 10 seconds

size: 134 x 22 x 14 mm

LCD: 20.7 x 7 mm

N.W.: 12.5g



**GT004-262**

**Fast reading / Water-proof  
Large LCD display**

Display range: 32.0°C~42.0°C,  
89.6°F~107.6°F

Accuracy:  $\pm 0.1^{\circ}\text{C}$ ,  $\pm 0.2^{\circ}\text{F}$

Min Scale: 0.1°C / 0.1°F

Response: 10 seconds

size: 134 x 22 x 14 mm

LCD: 20 x 7.5 mm

N.W.: 13.5g

**GT004-263**

**Fast reading**  
**Flexible probe**  
**Large LCD display**

Display range: 32.0°C~42.0°C,  
89.6°F~107.6°F

Accuracy:  $\pm 0.1^{\circ}\text{C}$ ,  $\pm 0.2^{\circ}\text{F}$

Min Scale: 0.1°C / 0.1°F

Response: 10 seconds

size: 134 x 22 x 14 mm

LCD: 20.7 x 7 mm

N.W.: 12.5g



**GT004-264**

**Fast reading**  
**Flexible probe**  
**Water-proof**  
**Large LCD display**

Display range: 32.0°C~42.0°C,  
89.6°F~107.6°F

Accuracy:  $\pm 0.1^{\circ}\text{C}$ ,  $\pm 0.2^{\circ}\text{F}$

Min Scale: 0.1°C / 0.1°F

Response: 10 seconds

size: 134 x 22 x 14 mm

LCD: 20.7 x 7 mm

N.W.: 12.5g



**GT004-265**

**Fast reading**  
**Flexible probe**  
**Water-proof**  
**Large LCD display**

Display range: 32.0°C~42.0°C,  
89.6°F~107.6°F

Accuracy:  $\pm 0.1^{\circ}\text{C}$ ,  $\pm 0.2^{\circ}\text{F}$

Min Scale: 0.1°C / 0.1°F

Response: 10 seconds

size: 132 x 22 x 14 mm

LCD: 20 x 7.5 mm

N.W.: 13.6g



## GT-004-266

### Cartoon Digital Thermometer

Cartoon design and flexible tip  
Measuring rang from 32°C to 42°C (89.6°F to 111.2°F)  
0.1°C accuracy and fast response  
Beep alarm when peak temperature is reached  
Memory for last measurement  
Automatic power off  
Weight: 9.7g (including battery)  
waterproof



## GT-004-267

### Digital Thermometer (waterproof)

Measuring rang from 32°C to 42°C (89.6°F to 111.2°F)  
LCD manifestation easy to read  
0.1°C accuracy and fast response  
Beep alarm when peak temperature is reached  
Memory for last measurement  
Automatic power off  
Weight: 9.6g (including battery)  
waterproof



## GT-004-268

### Digital Thermometer (waterproof)

Convenient flexible tip (soft head)  
10 seconds quick test  
Big LCD display easy to read  
Waterproof construction provides easy cleaning  
Measuring range from 32°C to 42°C (89.6°F to 111.2°F)  
0.1°C accuracy and fast response  
Beep alarm when peak temperature is reached  
Memory for last measurement  
Automatic power off  
Weight: 15g (including battery)  
Measurement time: 10 seconds





## GT004-240

**Baby use  
Digital Thermometer**

3-Digital  
Scale: °C or °F  
Accuracy:  $\pm 0.1^{\circ}\text{C}$  ( $\pm 0.2^{\circ}\text{F}$ )  
Min Scale:  $0.1^{\circ}\text{C}$   
Memory function: last temperature  
Measuring times: 2 minutes  
Beeper function  
Auto shut-off



## GT004-241

**Baby Pacifier  
Digital Thermometer (Waterproof)**

1) Display range:  $32.0\text{--}42.0^{\circ}\text{C}$ / $90.0\text{--}107.6^{\circ}\text{F}$   
2) Accuracy:  $\pm 0.1^{\circ}\text{C}$ / $\pm 0.2^{\circ}\text{F}$   
3) Min. scale: 0.1  
4) Memory: last measurement reading  
5) Measurement time (reference only, it differs from people to people): 2min  
5) Beeper function  
6) Auto shut-off  
7) Battery: 1.5V button battery (LR/SR-41)  
8) Size: 62 x 46 x 50mm  
9) LCD: 15 x 6mm  
10) N.W.: 13g  
11) Memory: last measuring reading



## GT004-251

Disposable probe cover

## GT004-250

**Infrared Ear Thermometer**  
3-Digital  
Scale: °C or °F  
Accuracy:  $\pm 0.2^{\circ}\text{C}$  ( $\pm 0.4^{\circ}\text{F}$ )  
Min Scale:  $0.1^{\circ}\text{C}$   
Memory function: 10 group  
Measuring times: 1 second  
Beeper function  
Auto shut-off



## GT004-252

**Infrared Ear Thermometer**  
1) Display range:  $34.0\text{--}44.0^{\circ}\text{C}$ / $93.2\text{--}111.2^{\circ}\text{C}$   
2) Accuracy:  $\pm 0.2^{\circ}\text{C}$ / $\pm 0.4^{\circ}\text{F}$   
3) Min. scale: 0.1  
4) Memory: 10 memories  
5) Measurement time (reference only): 1 second  
6) Beeper function  
7) Auto shut-off (1min after idle)  
8) Battery: 3V, Button battery (LR/CR 2032)  
9) Battery life: approx. 4,000 takes  
10) Dimensions: 110 x 35 x 35mm  
11) N.W.: 36g (including batteries)  
12) Safe and hygienic  
13) Easy-clean and cover free design

## GT004-253

### Infrared Ear Thermometer

- 1) Display range: 34.0~44.0°C/93.2~111.2°C
- 2) Accuracy:  $\pm 0.2^{\circ}\text{C}/\pm 0.4^{\circ}\text{F}$
- 3) Min. scale: 0.1
- 4) Memory: 10 memories
- 5) Measurement time (reference only): 1 second
- 6) Beeper function
- 7) Auto shut-off (1min after idle)
- 8) Battery: AAA x 2, alkaline batteries
- 9) Battery life: approx. 4,000 takes
- 10) Size: 146 x 32 x 37mm
- 11) N.W.: 75g (including batteries)
- 12) Safe and hygienic
- 13) Requires new disposable probe cover after each use



## GT004-254

### Infrared Ear Thermometer

- 1) Display range: 34.0~44.0°C/93.2~111.2°C
- 2) Accuracy:  $\pm 0.2^{\circ}\text{C}/\pm 0.4^{\circ}\text{F}$
- 3) Min. scale: 0.1
- 4) Memory: 10 memories
- 5) Measurement time (reference only): 1 second
- 6) Beeper function
- 7) Auto shut-off (1min after idle)
- 8) Battery: 3V, Button battery(LR/CR 2032)
- 9) Battery life: approx. 4,000 takes
- 10) Dimensions: 118 x 28.5 x 21mm
- 11) N.W.: 36g (including batteries)
- 12) Safe and hygienic
- 13) Easy-clean and cover free design





### **GT004-255** **Infrared Thermometer**

Range of displayed temperature: 32.0°C–42.9°C (89.6°F–109.2°F)

Ambient temperature operating range: 10°C–40°C (50°F–104°F)

Storage temperature range: –25°C–55°C (–13°F–131°F)

Digital increment: 0.1°C/0.1°F

Maximum permissible error:

±0.2°C/0.4°F 35.5–42.0°C (95.9°F–107.8°F)

±0.3°C/0.5°F 32.0–35.4°C (89.6°F–95.7°F)

±0.3°C/0.5°F 42.1–42.9°C (107.8°F–109.8°F)

### **GT-004-256**

**Infrared Ear Thermometer**  
**(single scale or double scale display)**

Display range: 32.0~42.9°C / 89.6~109.2°F

Accuracy: ±0.2°C / ±0.4°F

Min. scale: 0.1

Memory: 10 memories

Measurement time (reference only): 1 second

Beeper function

Auto shut-off (10 seconds after idle)

Battery: 3V, Button battery (CR 2032)

Battery life: approx. 5,000 takes

Dimensions: 140 x 35 x 30mm

Weight: 40g (including battery)



## Productos de Diagnóstico



**GT004-310**  
Air Thermometer

**GT004-320**  
Bath Thermometer



**GT007-200**  
Alcohol tester

Advanced NM Hot-wire alcohol sensor  
Quick response  
SMD assembling, stable performance  
Smart MCU control  
Direct Testing process LCD indication  
Portable design  
No Touch Health Design  
Audio and visible warning beyond preset level  
Battery saving design, low voltage indication



**GT008-100**  
Blood Glucose Monitoring System

Measuring range: 2.2-27.8mmol/L(40-500mg/dl)  
Measuring time: 20 seconds  
Memory capacities: 30  
Power source: two replaceable 3-volt batteries(CR2032)  
Battery life:  $\geq 1000$  tests  
Life of test strips:  
12 months(vial sealed), 3 months (after vial opened)  
Volume of blood: 20  
Net weight: 52g  
Dimensions: 97(L) x 55(W) x 15(H)mm

## GT008-200

### Blood Glucose Meter & Test Strips

#### I. Features:

1. Economy --- low price with good quality.
2. Utility --- one key operation, convenience and utility.
3. Rapidity --- only one drop of blood, it can come to an accurate result in 20 seconds.
4. Multifunction adding --- 30 memory capacitances, easy to check.
5. Warranty --- we committed a 5-year free service.

#### II. Specifications:

1. Measuring Range: 2.2-27.8mmol/L (40-500mg/dl)
2. Test Sample: Fresh Capillary Whole Blood
3. Sample Size: Approx 3-5 microlitres
4. Measuring Time: 20 seconds
5. Type A Type C 5. Memory capacitance: 30 results
6. Battery Life:  $\geq 1000$  tests Type A Type C
7. Battery low warning: The battery low warning (battery icon) shall occur when the battery voltage is low
8. Life of test strips: 18 months (vial sealed), 2 months (after vial being opened)
9. Net weight: 44g
10. Volume of blood:  $\geq 15\mu\text{l}$ (Type A), about  $4\mu\text{l}$ (Type C)



## GT008-300

### Blood Glucose Meter & Test Strips

Blood glucose meter is a new meter

#### I. Features:

1. Multifunction: including the pulse test
2. Less Measuring Time: 5 seconds
3. More Memory capacitance: 60 results
4. Big screen
5. Warranty --- we committed a 5-year free service.

#### II. Specifications

1. Measuring Range: 2.2-27.8mmol/L (40-500mg/dl)
2. Measuring Time: 5 seconds
3. Memory capacitance: 60 results (Advanced)
4. Battery Life:  $\geq 1000$  tests
5. Power Source: Two replaceable 3-volt batteries(AAA)
6. Meter Repeatability:  $sd \leq 3\text{mg/dl}$
7. Life of test strips: 18 months (vial sealed), 2 months (After vial opened)
9. Measuring Rang of PR: 30 bmp~240 bmp
10. Measuring Time: 8 seconds

The meter will turn on after you insert a strip, and will shut down automatically in 10 seconds without the input signal





**PRODUCTOS DE  
DIAGNÓSTICO**  
PHYSICIAN SCAN

## Productos de Diagnóstico



**GT130-100**  
**Electronic Infant Scale**  
 Max. Weighing: 20kg



**GT130-200**  
**Baby Scale**  
 Max. Weighing: 20kg



**GT130-300**  
**Electronic Infant Scale**  
 Max. weighing: 20kg  
 Min. value per division: 50g



**GT130-400**  
 Max. weighing: 25kg  
 Min. value per division: 100g



**GT130-500**  
**Baby Scale**  
 1. Tray Size: 56X28X9.3cm  
 Body Size: 36X29.5X7.5cm  
 Net Size: 56X31.5X13.5cm  
 2. Max. weight : 30kg  
 3. Graduation: 5g  
 4. Lcd Display+ auto Power Off  
 +low Battery Indicator+1 Loadcell  
 5. Precision: +/-1%  
 6. Displayed In Two Units: Kg/Lb/Oz  
 7. Batteries: 4xaa(not included)  
 7. Lcd Size: 7^2.8cm

## Productos de Diagnóstico



**GT131-120**  
**Health Scale**  
Max. Weighing: 120kg



**GT131-160**  
**Health Scale**  
Max. Weighing: 160kg



**GT131-200**  
**Health Scale**  
Max. Weighing: 200kg



**GT131-300**  
**Electronic Body Scale**  
Max weighing: 200kg  
Division: 100g  
Display: LED Power: AC/DC  
Height range to be measured: 800-2100mm  
Min value of height per division: 5mm  
G.W.: 15kg N.W.: 13kg  
Measurement: 100 x 32 x 26cm



**GT131-400**  
**Electronic Body Scale**  
Max weighing: 200kg  
Division: 100g  
Display: LCD Power: AC/DC  
Height range to be measured: 800-2100mm  
Min value of height per division: 5mm  
G.W.: 15kg N.W.: 13kg  
Measurement: 100 x 32 x 26cm

## Productos de Diagnóstico



**GT132-101**  
Bathroom scale



**GT132-102**  
Bathroom scale



**GT132-103**  
Bathroom scale



**GT132-202**  
Bathroom scale

## Productos de Diagnóstico



**GT132-203**  
Bathroom scale

**GT132-204**  
Bathroom scale



**GT132-205**  
Bathroom scale



**GT132-206**  
Bathroom scale



**PRODUCTOS DE  
DIAGNÓSTICO**  
MOBILITY AID

# Productos de Diagnóstico



**GT135 - 874L**  
Wheel chair  
Aluminum type



**GT135 - 809**  
Wheel chair  
Steel type



**GT135-909B**  
Wheel chair  
Steel type



**GT135-870ABJ**  
Wheel chair  
Steel type

## MAIN PARAMETERS

MEASUREMENTS(cm) MODEL NO													
GT135-809-41(-46)	60(65)	24	41(46)	59	20	50	87	106	40	45	100	93x24x88	19/ 21
GT135-874L-41	63	28	41	57	15	45	82	100	40	45	100	90x28x85	13/ 15
GT135-909B-41(-46)	56(61)	28	41(46)	60	20	50	94	109	40	45	110	80x28x94	20/ 22
GT135-870ABJ-41(-46)	61(66)	28	41(46)	40	15	45	90	100	40	45	100	82x28x70	15/ 17

## Productos de Diagnóstico



**GT135-871LB**  
Wheel chair  
Aluminum type



**GT135-952LBC**  
Wheel chair  
Aluminum type



**GT135-874LAH**  
Wheel chair  
Aluminum type

### MAIN PARAMETERS

MEASUREMENTS(cm) MODEL NO													
											(Kg)	DIM	NW/GW
GT135-871LB-41(-46)	58(63)	28	41(46)	40	15	47	89	90	36	40	100	80x28x90	10/ 12
GT135-874LAH-35	58	28	35	52	15	45	85	93	36	45	90	86x28x68	12/ 14
GT135-952LBC	65	35	41	61	15	51	93	106	40	45	120	80x34x94	17/ 19

# Productos de Diagnóstico



**GT135-681**  
Commode wheelchair

**GT135-681A**  
Commode wheelchair

**GT135-619GC**  
Commode wheelchair

## MAIN PARAMETERS

MEASUREMENTS (cm) MODEL NO													
GT135-681-46	66	30	44	59	15	50	89	102	44	44	100	75x33x89	23 / 25
GT135-681A-46	66	30	44	59	15	50	95	102	43	51	90	75x33x76	22.6 / 25.6
GT135-619GC	66	—	44	58	20	55	129	—	90	184	100	92x34x92	25.2 / 28.7

**Walker**



**GT136-913L**



**GT136-917L**



**GT136-915L**



**GT136-912L**



**GT136-914L**

**MAIN PARAMETERS**

MODEL Number	LENGTH (cm)	WIDTH (cm)	HEIGHT (cm)	N.W. (Kg)	 (cm)	P C S CN	G.W. (Kg)
GT136-912L	57	60	74.5-92	2.6	58x18x81	2	7
GT136-913L	56	57	74.5-92	2.4	54x18x80	2	6
GT136-914L	52	60	82-92	3.6	60x35x93	2	9.4
GT136-915L	56	60	74.5-92		58x18x81	2	7
GT136-917L(L)	57	42	87-97	1.4	95x68x35	10	16
GT136-917L(M)	57	42	77-87	1.2	85x68x35	10	14
GT136-917L(S)	57	41	67-77		75x68x35	10	12

## COMMODE CHAIR - WITHOUT WHEEL



**GT136-810**




**GT136-898**

### MAIN PARAMETERS

Item Code									PCS CN	G.W (kg)
							N.WT(kg)	DIM		
GT136-810	56	46	41-51	74-84	40	33	6	60x32x48	2	13.4
GT136-898	41	38	40		40		1.6	75x30x40	6	10.7

## Stick

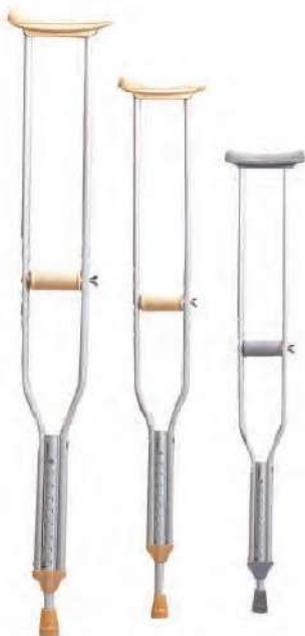

**GT137-925L**



**GT137-928L**



**GT137-938L**



**GT137-936L**



**GT137-927L**

### MAIN PARAMETERS

MODEL Number	HEIGHT (cm)	N.W. (Kg)		PCS CN	G.W. (Kg)
GT136-925L(L)	128-148	0.9	132x33x29	20	19
GT136-925L(M)	116-136	0.85	119x33x29	20	18
GT136-925L(S)	103-123	0.8	103x33x29	20	17
GT137-927L	82-92	0.3	64x29x16	20	7
GT137-928L	77.5-100	0.3	79x29x18	20	7
GT137-936L	120	0.3	35x20x26	40	13
GT137-938L	77.5-100	0.35	79x34x19	20	8

## Productos de Diagnóstico



### MAIN PARAMETERS

MODEL Number	HEIGHT (cm)	N.W. (Kg)	 (Cm)	PCS CN	G.W. (Kg)
GT137-910L	89	0.3	94x28x15	20	7
GT136-921	72.5-95	0.9	79x34x43	10	10
GT136-922	72.5-95	0.9	60x28x47	10	10
GT136-924	65-87.5	0.8	79x34x43	10	9
GT137-929L	68.5-91	0.3	65x28x15	20	7
GT137-930L	68.5-91	0.3	65x28x15	20	7
GT136-932	80-102.5	0.9	60x28x47	10	10

**GT141 Tractor for neck ache**



**GT141-101**

**Tractor for neck ache**

Designed for treating and preventing neck fractured is location of vertebra. Protrusion of the intervertebral disc and excessive stretch and draw. It can support the patient's head efficiently depending on appropriate air pressure, so that it can release the neck and shoulder burden. Also it has the magnetic infrared treatment function to dispel the pain.

**GT141-102**



**GT141-110**

**cervical collar**  
macromolecule foam materials, light.



**GT142-101**



**GT142-102**

**GT142 Luxurious eyesight lamp box**

This is served as an apparatus for eyesight examination in hospitals .  
In practical use, it boasts the advantages of soft and comfortable lighting levels and, being made of alluminum materials, it has a very handsome appearance.  
There are three styles available—desktop style, wall style and hanging style.  
Main Technical data:  
Power voltage: AC 220V ± 10%  
Frequency: 50Hz  
Power: 60w



**GT140-102**  
**Infusion stand**



**GT143-200**  
**Operation reflector lamp**

Stainless haulm,  
hose flexible lift type,  
unbending rise or drop.  
Voltage: AC 220V;  
frequency: 50Hz;  
power: 60W

A person wearing a white lab coat and gloves is pointing at the screen of a medical ultrasound machine. The machine is white and has a large screen on the left side. The person's hand is in the foreground, pointing towards the screen. The background is a plain, light-colored wall.

**PRODUCTOS DE  
DIAGNÓSTICO**  
HOSPITAL EQUIPMENT



GT147-101

## GT147-101

### *Single channel automatic electrocardiograph*

High resolution thermal printer  
AC/Rechargeable battery  
Unique design of rhythm lead  
LCD Display  
A C,EMG and DFT Filter  
Waveform display

## GT147-201

### *12 channel digital electrocardiograph*

#### **Features Literature Technical Gallery Main Features**

1. Design patent issued by the State Intellectual Property Office of China
2. Reliable measurement and analysis result contributed by CSE database
3. Software copyright patent of "real-time age-analysis" which ensures accurate analysis results issued by the State Intellectual Property Office of China
4. 12.1" color TFT LCD display
5. Simultaneous acquisition and display of 12 channel ECG waveforms
6. Alphameric keyboard, one touch operation
7. Complete digital filters of ADS, EMG, HUM and low-pass
8. Freeze function: observe any abnormal ECG waveform
9. Pre-10-second printing function: print out any abnormal ECG waveform
10. Multi-format printouts
11. Any lead can be rhythm lead
12. Detection and alarm of lead-off and low battery capacity
13. Automatic adjustment of baseline for optimal recording
14. Built-in Help Function: electrode positioning, ECG basic knowledge, common trouble-shooting and so on
15. Clinical information such as patient ID, name, gender, age, height, weight, blood pressure, hospital name can be input
16. Maximum 2,000 ECG files can be saved. Saved ECG files can played back or printed out
17. Flexible saving interface. Saved ECG files can be displayed in image-text or list format, easy for search
18. Auto-save function: after printing, the printed ECG file will be automatically saved to flash or SD card
19. Communicate with PC for ECG data management(option)

Functions of T12 are listed in below table.



GT147-201



GT147-106

## GT147-106

### *Six channel interpretive electrocardiograph*

High resolution thermal printer  
Anti drift filter  
Multiple print Format  
AC/Rechargeable battery  
Simultaneous 12 lad acquisition  
LCD Display  
ECG measurement/Interpretation  
Powerful AC & EMG Filter

## GT147-602

### Single channel digital electrocardiograph

- 12-lead simultaneous acquisition
- 3.8" LCD, real-time display of 12 channel ECG waveforms
- Detection and alarm on lead-off and low battery capacity
- Automatic adjustment of baseline for optimal printing
- Built-in ECG simulator for DEMO purpose
- 3 kinds of operation mode: AUTO, MAN and ANA
- 3 kinds of filter: HUM, EMG and ADS
- power supply: AC, DC and battery
- 2 types lead mode: Standard and Cabrera
- 15 ECG files can be save in the ECG
- 1,000 ECG files can be save to SD card ( Option )
- Communication with PC (Option)



GT147-602



GT147-603

## GT147-603

### Fetal monitor

#### Main performance

##### Security:

Anti-shock types: Facilities I, no internal power supply Anti-electric Shock Degree: B Working Voltage: AC 100 V-240 V  
 Frequency: 50 Hz/60 Hz P<60 VA Fuse: T1.6AL250V Display Dimensions: 8.0" color LCD display, folding 60 degree Display  
 Content: bed No., pregnancy weeks, age, paper speed, date, time, volume, alarm status, transducer connection status, recorder status,  
 FHR data and wave, Contraction data and wave, Fetal move times and mark etc.

##### Print:

Record Paper two-double type Z Print Width: 112 mm Valid Print Width: 104 mm Paper output speed: 1 cm/min, 2 cm/min,  
 3 cm/min(optional) Data Precision:  $\pm 5\%$  ( X Roll ) ,  $\pm 1\%$  ( Y Roll ) Record Content: hospital, bed No., name, pregnancy weeks,  
 patient No., paper speed, date, time, FHR data and wave, Contraction data and wave, Fetal move times and mark etc.

##### Ultrasound probe:

Nominal Frequency: 1.0 MHz Work Frequency: 1.0 MHz  $\pm 10\%$   
 Negative peak sound pressure:  $p_{-} < 1$  MPa Output beam intensity:  $I_{ob} < 20$  mW/cm<sup>2</sup>  
 The peak time space peak intensity:  $I_{spta} < 100$  mW/cm<sup>2</sup> The average time space peak intensity:  $I_{sata} < 10$  mW/cm<sup>2</sup>  
 FHR Rang: 50 BPM-240 BPM Resolution: 1 BPM Accuracy:  $\pm 2$  BPM

##### TOCO

TOCO range: 0-100% Resolution: 1%  
 Nonlinear error:  $< \pm 10\%$  RZ way: Manually

##### Fetal Marking

For the manual button (the operation of pregnant women),  
 there will be a mark display  
 in the bottom area of FHR wave display section.

FHR Alarm: Alarm for high and low FHR, which exceeds appointed limit.



GT148-101  
ECG Paper



GT148-301  
Electrode code



GT148-201  
Ultrasound gel

## GT148-202

### 5L barrel pliancy

#### Technical Parameter

- 1) pH value: 5.5 ~ 8.0
- 2) viscosity (25°C):  $\geq 15$  Pa.s
- 3) velocity of sound: 1520 - 1620 m/s
- 4) acoustic impedance:  
 $1.5 \times 10^6 \sim 1.7 \times 10^6$  Pa<sup>2</sup>/s/m
- 5) acoustic attenuation:  
 $\leq 0.1$  dB/(cm · MHz)



## GT147-50D+

### Fingertip oximeter

Display Mode: 0.96" Dual-color OLED display (blue and yellow)  
 Screen Resolution: 128\*64  
 SpO2 Measuring Range: 0% ~ 100%, (the resolution is 1%).  
 Accuracy: 70% ~ 100%:  $\pm 2\%$ , Below 70% unspecified.  
 PR Measuring Range: 30bpm ~ 250bpm, (the resolution is 1bpm)  
 Accuracy:  $\pm 2\text{bpm}$  or  $\pm 2\%$  (select larger)  
 Measurement Performance in Weak Filling Condition: SpO2 and pulse rate can be shown correctly when pulse-filling ratio is 0.4%.  
 SpO2 error is  $\pm 4\%$ , pulse rate error is  $\pm 2\text{ bpm}$  or  $\pm 2\%$  (select larger).  
 Resistance to surrounding light: The deviation between the value measured in the condition of man-made light or indoor natural light and that of darkroom is less than  $\pm 1\%$   
 Power Consumption: less than 30mA  
 Voltage: DC 2.6V ~ 3.6V  
 Power Supply: 1.5V (AAA size) alkaline batteries  $\times 2$   
 Battery working hour: Theoretical number is 32 hours.  
 Safety Type: Interior Battery, BF Type

### Sell in standard:

A hanging rope  
 A user manual  
 A data line

A disk (PC software)

Sell in addition:

RF wireless module  
 Oximeter probe (Refer to probe application instruction for details and notice renewal)

### Physical Identity

Dimension: 58.5(L)  $\times$  31(W)  $\times$  32(H) mm  
 Weight: About 52g (with the batteries)



## GT147-50DL

### Fingertip oximeter

LED display  
 SPO2: 35~99% pulse ratio: 30~250BPM  
 Resolution: 1% for SPO2, 1BPM for pulse ratio  
 Accuracy:  $\pm 2\%$  (70% ~ 99%), unspecified (<70%) for SPO2,  $\pm 2\text{BPM}$  or  $\pm 2\%$  (select larger) for pulse ratio  
 Power: 1.5V (AAA size) alkaline batteries  $\times 2$   
 Can work more than 30 hours continuously  
 Interference resistance capacity against ambient light and measurement performance at low perfusion

### Sell in standard:

A hanging rope

A user manual

### Physical Identity

Dimension: 61(L)  $\times$  36(W)  $\times$  32(H) mm

Weight: About 50g (with the batteries)



## GT147-60D

### Handheld oximeter

SPO2:  
 Measurement Range: 0 ~ 100%  
 Resolution: 1%  
 Accuracy:  $\pm 2\%$  (70% ~ 100%, Adult/Pediatric, non-motion)  
 $\pm 3\%$  (70% ~ 100%, Neonate, non-motion)  
 0% ~ 69% unspecified  
 Alarm Range: 0% ~ 100%  
 Refreshing Rate: 1s  
 Pulse Rate:  
 Measurement Range: 25 ~ 250 bpm  
 Resolution: 1 bpm  
 Accuracy:  $\pm 3\text{ bpm}$  (non-motion)  
 Alarm Range: 25 ~ 250 bpm  
 Refreshing Rate: 1s

### Sell in standard:

A user manual  
 A data line  
 A disk (PC software)

An oximeter probe

Sell in addition:

Other oximeter probe (Refer to probe application instruction for details and notice renewal)

### Physical Identity

Dimension: 110(L)  $\times$  60(W)  $\times$  23(H) mm  
 Weight: About 180g (with Alkaline battery 2AA)



## GT147-901

### Handheld ECG Monitor

#### Main Function

Direct collection of ECG on chest,  
 realtime refresh of display and memory  
 Frozen and extended display during ECG  
 collection and replay Character display of ECG  
 parameter (HR, QRS, RH, P-R)  
 Rhythm classification with Multi-Language  
 and alarm in dangerous  
 Display of heart beating period histogram  
 in order and random  
 Storage and access of typical ECG segments  
 Output port can be connected to any ECG  
 machine or micro-printer to get record



### GT151-101

#### Electronic spirometer

Test range: Vc:0 ~ 9999mL

Accuracy:  $\leq \pm 5\%$  (F.S)

Working environment: 5 ~ 40°C

Relative humidity:  $\leq 80\%$ RH

Power: 220V(or 2 AA battery)



### GT151-102

#### Electronic spirometer

vital capacity: Vc:0 ~ 10L

accuracy: :  $\leq \pm 5\%$  (F.S)

tidal volume: 0.10 ~ 2.00L

accuracy: :  $\leq \pm 5\%$  (F.S)

Max. voluntary ventilation/min :0 ~ 200L/min

accuracy: :  $\leq \pm 5\%$  (F.S)

Working environment: 5 ~ 40°C

relative humidity:  $\leq 80\%$ RH

power:220v



### GT151-103

#### Electronic spirometer

vital capacity: Vc:0 ~ 10L

accuracy: :  $\leq \pm 5\%$  (F.S)

tidal volume: 0.10 ~ 2.00L

accuracy: :  $\leq \pm 5\%$  (F.S)

Max. voluntary ventilation/min :0 ~ 200L/min

accuracy: :  $\leq \pm 5\%$  (F.S)

Working environment: 5 ~ 40°C

relative humidity:  $\leq 80\%$ RH

power:220v

## GT149-204

### Compressor nebulizer

This equipment sprayed liquid medication to fog panel by compressing air, and form tiny particles, which flow into the throat through imbibing tube. It adopts oil-free-high-efficiency valve with no need for daily lubrication and it is with low noise, tiny particles. It is an ideal product for family and medical units' use.

**Principle technical date:**

Maximum compressor pressure:  $\geq 0.15$  Mpa

Compressor free air flow:  $\geq 10$  L/MIN

Maximum nebulization rate:  $\geq 0.2$  ML/MIN

Power :< 150 VA



## GT149-205

### Compressor nebulizer

This equipment sprayed liquid medication to fog panel by compressing air, and form tiny particles, which flow into the throat through imbibing tube. It adopts oil-free-high-efficiency valve with no need for daily lubrication and it is with low noise, tiny particles.

It is an ideal product for family and medical units' use

Powerful piston pump is efficient, dependable and quiet.

Comes complete with ampule for nebulizing, mouth piece, tubing and user manual.

**Principle technical date:**

New, lightweight portable design:  $\leq 2.0$  KG

Electric requirements: AC220  $\pm$  22V 50Hz  $\pm$  1Hz

Maximum compressor pressure:  $\geq 0.15$  Mpa

Compressor free air flow:  $\geq 10$  L/MIN

Maximum nebulization rate:  $\geq 0.2$  ML/MIN

Sound level:  $\leq 65$  dB (A)

Power :< 150 VA



## GT149-206

### **Nebulizer series**

Atomizer adopts all-transistor circuitry, passes through electron coupling oscillating circuit it, produces ultrasonic. The ultrasonic makes water soluble medicine become tiny particles by aqueous medium. It reaches user's mouth by mouth piece and mask.

### **Features: various uses, more suitable for home use**

- 1, This product is suitable for the surroundings, which need faint scent or disinfectant, or increasing humidity.
- 2, Facial cleaning & beauty care: Applying over 1MHz ultrasonic nebulized mist to clean the face is very effective, and it is a usual skin care method, very convenient and comfortable.
- 3, Jewelry cleaning: Immerse the jewelry in the detergent and then turn on the machine. The grease and dirt can be removed from the jewelry after 10 minutes.

### **Principal technical data:**

Voltage: AC220V 50Hz

Power: 45VA

Ultrasonic frequency: 1.7MHz  $\pm$  10%

Max nebulizing rate:  $\approx$  3ml/min

Timing range: 0- 60min no adjustable range

Continuous load time:  $\approx$  4h

Medication cup capacity:  $\approx$  150ml



## GT149-101

### **Ultrasonic nebulizer**

Max capacity of medicine cup: 50ml;

Capacity of water trough: 250ml

Nebulizing amount: 3ml/min-5ml/min



**GT149-201**

**Compressor nebulizer**

Max capacity of medicine cup: 10ml  
Nebulizer rate: 0.4ml/min  
Particle size rate: 5.2  $\mu$ m (MMD\*)  
Residual of a medicine:  $\square$ 0.5 ml  
Noise: 56dB(A)



**GT149-202**

**Compressor nebulizer**

Max capacity of medicine cup: 5ml  
Nebulizer rate: 0.2ml/min  
Particle size rate: 2.5  $\mu$ m (MMD\*)  
Residual of a medicine:  $\square$ 0.5 ml  
Noise: 50dB(A)



**GT-149-203**

**Handholding Style Ultrasonic Nebulizer AC and DC Commutable**

Max capacity of medicine cup: 10ml  
Capacity of water trough: 50ml  
Nebulizing amount: 1ml/min-2ml/min  
Gross weight of single package: 1000g, 10in one package



**GT150-300**

**Urine Analyzer**

**Main technical:**  
Testing items: GLU, BIL, SG, KET, BLD, PRO, URO, NIT, LEU, Ve, PH value  
Testing wavelength: 550nm, 620nm, 720nm  
Testing speed: 144 pieces/hour  
Data storage: storage of no less than 3000 sample data, free query in term of testing data and sample number  
Reaction time: 25-30 seconds  
Printer: built-in high-speed, temperature sense printer  
Power supply: 220V  $\pm$ 22V 50Hz  $\pm$ 1Hz



### GT146-101

#### *Characteristics:*

1. Fully stainless steel structure.
2. Double scale indication pressure gauge.
3. Electric heated.
4. Easy to operate, safe and reliable



### GT146-102

#### *Vertical pressure steam sterilizer*

#### *Characteristics:*

1. Fully stainless steel structure
2. Hand wheel type of quick-open door structure
3. Door safety lock system
4. Automatically controlled by computer
5. Digital display of working status, touch of key
6. Over temperature & over pressure auto-protection
7. Steam-water inner circulation system: no steam discharge, and the environment for sterilizing will be clean and dry
8. Self-inflating type seal
9. Safe protection of water lacking
10. The drying system is optional, which can be equipped according to the customers' request
11. Automatically shut off with beep reminding after sterilization
12. With two stainless steel sterilizing baskets



## GT146-103

*Vertical pressure steam sterilizer*

**Characteristics:**

1. Fully stainless steel structure
2. Hand wheel type of quick-open door structure
3. Door safety lock system
4. Automatically controlled by computer
5. Digital display of working status, touch of key
6. Over temperature & over pressure auto-protection
7. Steam-water inner circulation system: no steam discharge, and the environment for sterilizing will be clean and dry
8. Self-inflating type seal
9. Safe protection of water lacking
10. The drying system is optional, which can be equipped according to the customers' request
11. Automatically shut off with beep reminding after sterilization
12. With two stainless steel sterilizing baskets



## GT146-104

*Horizontal Cylindrical Pressure Steam Sterilizer*

**Characteristics:**

1. Sterilizing course automatic sterilization controlled, easy to operate.
2. With drying function, suitable dressing drying.
3. With over-temperature, over-pressure auto-protect device.
4. The door opening mechanism cannot be operated until the pressure in the chamber is reduced to 0.027MPa. It can't be start on if the door doesn't close well.
5. The safety valve will be open automatically when the inner pressure over 0.24MPa, and the steam be exhausting to the water tank.
6. The power will be cut-off automatically, cut-off the water and alarm when the machine lacking water.
7. The chamber of the sterilizer is made of stainless steel.



**GT151-104**  
Oxygen absorber



**GT151-107**  
Oxygen absorber



**GT151-108**  
Oxygen absorber



**GT151-109**  
Oxygen absorber

Model	Service Medium	Max. discharge pressure	Max discharge pressure	Nominal Flow Rate	Precision class	Inlet Connection	Outer Connection
GT151-104	Oxygen	200Kg/cm <sup>2</sup>	0.2-0.3 Mpa	1-10L/min	4 Class	CGA540	M10X1-RH(M)
GT151-107	Oxygen	150Kg/cm <sup>2</sup>	0.2-0.3 Mpa	1-15L/min	4 Class	G5/8"-RH(F)/CGA540	M10X1-RH(M)
GT151-108	Oxygen	150Kg/cm <sup>2</sup>	0.2-0.3 Mpa	1-15L/min	4 Class	G5/8"-RH(F)/CGA540	9/16-18RH(M)
GT151-109	Oxygen	200Kg/cm <sup>2</sup>	0.2-0.3 Mpa	1-10L/min	4 Class	G5/8"-RH(F)/	M10X1-RH(M)

## Productos de Diagnóstico



**GT138-106**  
PP material  
size:32 x 23.8 x 8.5cm  
110g



**GT138-107**  
PE material, 1000cc,  
size:32 x 21 x 10.5cm  
60g



**GT138-108**  
PP material,  
size:36.5 x 28 x 10.6cm  
180g



**GT138-109**  
PE material,  
size: 34 x 26.5 x 9cm  
300g



**GT138-110**  
PP material,  
size: 34oz, 230g



**GT138-111**  
PP material,  
size: Up-dia :12.2cm,  
Bottom-dia:9.3cm ,  
H:16.3,63g



**GT138-112**  
PE material,  
size: Up-dia:11.5cm,  
Bottom-dia:8, H :13.6cm,  
capacity:800ml,13g



**GT138-113**  
PP material,  
size: 51 x 28 x 9cm  
500g



**GT138-114**  
News paper  
size: 25.5 x 11.5 x 11cm



**GT138-115**  
News paper  
size: 25 x 11 x 10.8cm



**GT138-116**  
PP material,  
size: 25 x 10 x 4.9cm  
25g

# Productos de Diagnóstico



GT138-117

GT138-118

GT138-119

GT138-120



GT138-121



GT138-122



GT138-123



GT138-124



GT138-101



GT138-102



GT138-103



GT138-104



GT138-105



GT139-100



# Sifam

Medical

**TU SOCIO DE CONFIANZA EN EL  
SECTOR SOCIOSANITARIO.**



 [www.sifammedical.com](http://www.sifammedical.com)  
 900 447 447  
 673 301 127